

CORE SERIESTM





Bryn Mawr™









Core Seri<u>es</u>™









Appalachian Blue™

Bryn Mawr™

Deer Creek™

Gold Strike™











Hemlock Bro<u>wn</u>™

Mountain Fieldstone™

Rustic Monarch™

Silver Sunrise™

Wind Ridge



The traditional "Self-Corner" of Natural Stone Masonry as it applies to Adhered Veneer applications. This is the very best value that genuine, natural thin stone veneer can offer!








PLATINUM SERIES[™]




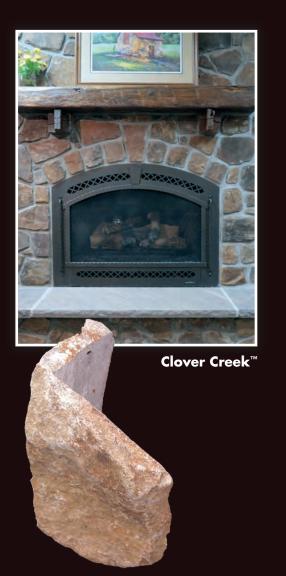







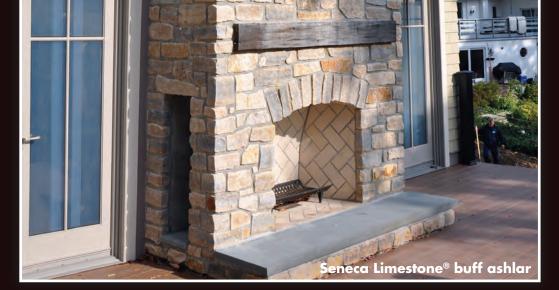













Applications















Blends



General Product Information

Rolling Rock Building Stone, Inc. 40 Rolling Rock Road Boyertown, PA 19512 Phone: 610.987.6226 RealStoneVeneer.com



Category	Product	Shape Description (Format)	Typical Thickness Range	Typical Face Size Range	Typical Weight Per Square Foot	General Stone Type	L-Corner (Y or N)	Density (lbs/cuft) ASTM C97	Absorption (%) ASTM C97	Compressive Strength (PSI) ASTM C170	Modulus of Rupture (PSI) ASTM C99
Fieldstone	Huntington Gray® Brookfield Buff®	- Irregular	0.50" to 1.5"	4"-15" Dia.	12	Quartzite Sandstone	Y	158	0.91	22,650	2110
	Chesterbrooke Blend®			4"-12" Dia.	12			156	0.71	21,500	4040
	Mountain Fieldstone™			4"-14" Dia.	14			167	0.36	26,830	3850
	Clover Creek™			4"-15" Dia.	12	Sandstone		N/A	N/A	N/A	N/A
	Pine Forge™			i io bia.		Gneiss		N/A	N/A	N/A	N/A
Ledge Rock	Carmel™	Ledge Rock	0.50" to 1.5"	4"-24" Long		Sandstone	Y	N/A	N/A	N/A	N/A
	Pacific™			1.5"-6" High	11	Quartzite					
	Massena™			4"-24" Long 2"-6" High		Limestone		N/A	N/A	N/A	N/A
	Hawk Mountain™			4"-14" Long 2"-6" High				158	0.91	22,650	2110
	Hickory™			4"-14" Long		Quartzite		N/A	N/A	N/A	N/A
	Mountain Fieldstone™			2"-5" High	12	Sandstone		167	0.36	26,830	3850
	Stonemont®			4"-16" Long 3"-7" High				158	0.91	22,650	2110
Sandstone	Appalachian Blue™	Irregular		4"-15" Dia.	14		N				
	Chestnut Traditional™	Roughly Square	0.50" to 1.5"	4"-16" Long	14	Sandstone	Y	N/A	N/A	N/A	N/A
	Russet Brown™	Ashlar Blend		4"-10" High	12		Y	153	2.6		
Quartzite	Deer Creek™	l		4"-15" Dia.							
	Gold Strike™		0.50" to 1.5"	4"-20" Dia.	13			N/A		N/A	N/A
	Rustic Monarch™	Irregular				Quartzite	N		N/A		
	Silver Sunrise™								<u> </u>		
Limestone	Seneca Limestone® buff	Irregular		4"-15" Dia.		Limestone	Y	165	1.42	14,900	3350
		Ashlar Blend		4"-20" Long 3"-10" High							
	Seneca Limestone® gray	Irregular	- 	4"-15" Dia.				165	1.75	15,100	2780
		Ashlar Blend		4"-20" Long 3"-10" High	1						
Other		Irregular		4"-15" Dia.							
	Arcadian™		0.50" to 1.5"	4"-20" Long	12	Recrystallized Marble	Υ	175	0.06	14,486	2828
	Down Married M	Ashlar Blend Irregular		3"-10" High						 	
	Bryn Mawr™ Hemlock Brown™			4"-15" Dia. 4"-15" Dia.	14		N	N/A	N/A	N/A	N/A
		Aztte		4"-15" Dia. 4"-20" Long		Schist		400	0.00	20.000	4400
	Crystal Lake®	Ashlar		2"-5" High 4"-20" Long	12		Υ	168	0.38	32,380	4100
	Wissahickon Schist™	Ashlar Blend		2"-10" High				167	0.45	16,700	2590

For additional information, please consult www.RealStoneVeneer.com

- Products as listed are sold nationally by Rolling Rock Building Stone, Inc. and its authorized resellers under the brand name RealStone Veneer™. All items marked with the ™ symbol are trademarks and the Rolling Rock Building Stone, Inc. logo is a registered trademark of Rolling Rock Building Stone, Inc.
- RealStone Veneer™ is a natural stone product. It is provided to you "AS IS" without warranty of any kind, either express or implied, including, but not limited to the implied warranties of merchantability or fitness for a particular purpose. Domestic raw materials are featured. Imported raw materials may be present in some products.
- Natural Stone is a relatively hard, naturally formed mineral or petrified matter, produced in nature. Therefore, considerable variations including, but not limited to, color, texture, size, and cleft will occur in all natural stone. Samples, sample panels, brochures, photographs, computer-generated pictures, and items viewed on the Internet may be, in some measure, different from the stone you actually receive. Laboratory tests, if conducted, are performed on small samples and cannot be totally accurate because of the limited scale of the tests. Please be sure that all parties involved are aware of these facts, so an informed decision can be made regarding natural stone.
- The recommended installation procedure for RealStone Veneer™ is Laticrete® MVIS as it is defined on their website www.laticrete.com/mvis and is published in their literature. Laticrete® also offers a limited warranty that applies to both the system and the installed stone product. This limited warranty applies only when Laticrete® specifications and products are implemented. Contact Laticrete® directly by using their website for more information. Rolling Rock Building Stone, Inc. does not manufacture this system, but has endorsed Laticrete® MVIS as the recommended installation system for all of its adhered veneer brands.
- When possible, choose an installing contractor that fits your desired application, rather than one that fits your budget. For a detailed explanation, contact your local RealStone Veneer™ representative.
- User accepts all responsibly if a 'dry stack' application is performed on any exterior project.
- Use of Chemicals: Acid or chemical cleaners are not recommended because of the inability of the user to control its use. User accepts all risks. ©2001-2020 Rolling Rock Building Stone, Inc. All rights reserved.







