

Gator Nitro Sand - Gator Dust - Gator Aqua Rock - Gator Tile System ator Base - Gator Base Screws - Gator Spacer - Gator Block Bond Vybrid Seal - Gator Xtreme Edge - Gator Edge - Gator Stone Bond r Polymeric Sands - Gator Nitro Sand - Gator Dust - Gator Aqu ator Fabric - Gator Base - Gator Base Screws - Gator Space al - Gator Hybrid Seal - Gator Xtreme Edge - Gator Edg Nails - Gator Polymeric Sands - Gator Nitro Sand - Gator Clean - Gator Seal - Gator Hybrid Seal - Gator Polymeric Gator Aqua Rock - Gator Tile System - Gator Clean - Gator - Gator Spacer - Gator Block Bond - Gator Clean - Gator - Gator Spacer - Gator Stone Bond - Gator Rock Bond - Gator Nitro Sand - Gator Stone Bond - Gator Rock Bond - Gator Nitro Sand - Gator Stone Bond - Gator Rock Bond - Gator Nitro Sand - Gator Stone Bond - Gator Rock Bond - Gator Nitro Sand - Gator Stone Bond - Gator Rock Bond - Gator Nitro Sand - Gator Block Bond - Gator Rock Bond - Gator Rock Bond - Gator Stone Bond - Gator Rock Bond - Gator Rock Bond - Gator Rock Bond - Gator Rock Bond - Gator Block Bond - Gator Block Bond - Gator Rock Bond - Gator Block Bond - Gator Block Bond - Gator Rock Bond - Gator Block Bond - Gator Block Bond - Gator Rock Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Rock Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Base - Gator Block Bond - Gator Block Bond - Gator Base - Gator Block Bond - Gator Block Block Block Block Block Block



THE **ALLIANCE ADVANTAGE**

NEW GATOR VIRTUAL EXPERIENCE

Alliance Designer Product introduces the **NEW virtual experience**. In this Advantage Catalog, use your smartphone to connect to Alliance's complete product line up online and more. Simply scan the QR code found on the page to instantly have access to product descriptions, features, installation, or application instructions, TDS and even videos! Gaining product knowledge with the QR codes has never been easier!

How to scan a QR code


In camera mode, hold your smartphone over a QR Code so that it's clearly visible within the screen.

- Smartphones will automatically scan QR code.
- Presto! Your smartphone will read the code and instantly navigate to the intended destination.
 - Note: If these steps do not work on your smartphone, a QR Code reader application may be required.





GATOR POLYMERIC STONE DUST

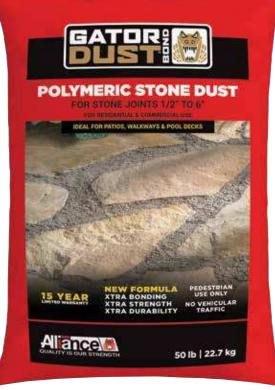

STONE GREY



Gator Dust Bond

Easy to install • Sweep it • Tamp it • Water it. And you're done!

Ideal for

- Residential use
- Pedestrian use
- Patios, walkways, pool areas and more
- Joints 1/2" to 6" wide

Features

- Traditional applications, Rain safe
 24 hours after water activation
- Works above 59°F (15°C)
- Waterproof bag
- 15 Year Limited Warranty

Coverage

Quantity required depends on the shape and size of the stones as well as the width of the joints.

Coverage per 50 lb (22.7 kg) bag Wet cast or natural stones 2" to 2-1/2" in height	Joints (1" to 2")			
Stone Grey & Sahara Beige	20 to 30 sq. ft. (1.86 to 2.79 sq. m.)			

Packaging

Retail Size: 50 lb (22.7 kg)

SCAN TO

LEARN MORE

Waterproof bags

Helps Prevent

- Weed sprouting
- Damages caused by insects
- Erosion due to climatic conditions

G2 GATOR POLYMERIC SAND





NO DUST • HAZE FREE NO BLOWER • ONE WATERING RAIN SAFE AFTER 15 MINUTES







BEIGE

Gator Supersand G2

For joints up to 2" in traditional applications

Ideal for

- Residential use
- Traditional applications
- Concrete pavers, natural stones, wet cast products and clay pavers
 Sloped areas, pool areas, patios, walkways, driveways and much more

Features

- Traditional applications, Rain safe 15 minutes after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Faster installation time











IVORY

Gator Maxx G2

For joints up to 4" in traditional and 2" in overlay applications

Ideal for

- Residential and Commercial use
- Traditional and overlay applications
- Concrete pavers, natural stones, wet cast products and clay pavers
- Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways and parking areas

- Traditional applications, Rain safe 15 minutes after water activation
- Overlay applications, Rain safe 24 hours after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Faster installation time











HAZE FRE

SO ID 1 22.7 kg

All ancel

For concrete paver joints up to 2" in traditional and overlay applications



Ideal for

Residential use

SLATE GREY

Traditional applications

Gator Supersand

For concrete paver joints up to

1" in traditional applications

- Concrete pavers, wet cast products
- Sloped areas, pool areas, patios, walkways, driveways and more

LEARN MORE

BEIGE

Features

- Traditional applications, Rain safe 1 hour after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Advanced Haze Free Technology

OSHA ASTM C-144

Ideal for

- Residential and Commercial use
- Traditional and overlay applications
- Concrete pavers, natural stones and wet cast products

SCAN TO

BEIGE

 Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways, parking areas and more

- Traditional applications, Rain safe 1 hour after water activation
- Overlay applications, Rain safe 24 hours after water activation
- Works above 32°F (0°C)
- Waterproof bag
- 15 Year Limited Warranty
- Advanced Haze Free Technology



GATOR POLYMERIC SAND





BEIGE



IVORY

BLACK DIAMOND

Gator Tile Sand

For outdoor porcelain tile joints

Ideal for

- Residential use
- Pedestrian use
- Outdoor porcelain tile joints

Features

- Traditional applications, Rain safe 1 hour after water activation
- Works above 32°F (0°C)
- Waterproof bag
- For use with the Gator Tile System only

Eurostone Bond

For natural stone paver joints

Ideal for

- Residential and Commercial use
- Stone joints up to a maximum of 1.5" (3.8 cm)
- Stone roads, piazzas, driveways, pathways & stone apron driveways



GATOR TILE SAND CAN ONLY BE USED WITH THE GATOR TILE 7 COMPONENT SYSTEM









Gator Fabric GF4.4

Gator Base

Gator Block Bond XP



Gator Spacer

Gator Tile Sand

Gator Base Screws







Features

- Traditional applications, Rain safe 1 hour after water activation
- Overlay applications, Rain safe 24 hours after water activation
- Works above 32°F (0°C)
- Does not haze natural stone pavers
- Will resist mechanical brooming
- 15 Year Limited Warranty



Allanc



Gator Aqua Rock

Graded ASTM No.9 granite stone

Ideal for

- Residential and Commercial use
- Permeable paver joints and bedding material
- Driveways, parking lots, patios and more




Features

- Graded to meet ASTM No. 9
- High-strength granite stone for long-term use
- Reduction of storm water run off
- Calibrated for the majority of permeable pavers
- 2,200 lb Supersack available for large applications







GATOR PERMEABLE STONE



- Waterproof bag









***STRENGTH FROM** ΤΟΡ ΤΟ ΒΟΤΤΟΜ

**** PERMEABLE**

APPLY RAIN OR SHINE

Gator Nitro Joint Sand

Gator Nitro Joint Sand is a ready-to-use mixture of calibrated sand and resins which cure when exposed to air, hardening from top to bottom of the joint. The product can be installed in wet or dry weather, in joints ranging from a minimum 3/16" to a maximum 2" joint width. The minimum joint depth is 1".

1.2 sq. m.

10 sq. ft.

0.93 sq. m.

Ideal for

19 mm joint

25 mm joint

1" joint

- Natural and wet cast stones
- Concrete pavers and slabs
- Traditional base
- Permeable or open graded installations
- Gator Base installations
- Pedestrian use
- Patios, pool areas, walkways

Coverage per 40 lb (18.1 kg) pail Paver or Stone 12" (30 cm) x 12" (30 cm) x 2-3/8" (60 mm) with joints of 3/16" (5 mm) to 1" (25 mm)							
	BEIGE	GREY	BLACK				
3/16" joint	56 sq. ft.	52 sq. ft.	47 sq. ft.				
5 mm joint	5.2 sq. m.	4.8 sq. m.	4.4 sq. m.				
3/4" joint	15 sq. ft.	13.9 sq. ft.	12.9 sq. ft.				

• 25% More strength • 25% Faster setting time

Features

 Traditional applications, Rain safe 18 hours after water activation

Proprietary formula with stronger resins

and guick-activating catalysts deliver:

- Works above 37°F (3°C)
- 5 Year Limited Warranty



Gator Nitro Joint Sand will harden from top to bottom up to 2 3/8". *

1.4 sq. m.

11.8 sq. ft.

1.1 sq. m.

** Permeable when installed. If not maintained, permeability will be obstructed over time.

1.3 sq. m.

10.8 sq. ft.

1 sq. m.



Gator

Screws

Follow the trend! Use Gator Base to build your seat wall or fire pit?

The Gator Base Advantages for Seat Walls and Fire Pits

- Gator Base is made of durable engineered material and will last forever
- Jobs are completed 20% faster than the old way
- Reduces needless excavation
- Reduces the effects of freeze and thaw cycles
- Less destruction on property during installation phase

Ideal for:

- Patios
- Pool decks
- Pathways

Maximum height $18^{\prime\prime}$ Around a fire pits Seat walls **´12''** In gardens **Pavers Gator Base** Compacted Sand or ASTM No.9 Stones Gator Fabric GF4.4

8" to 12"

Gator

Edge

Compacted Native Soil Diagram not drawn to scale.




When building a fire pit, the important thing to remember is to provide a thermal barrier between the Gator Base and the heat source, as shown in the options below.




Air gap • • Concrete pavers • Gator Base

OPTION 2 Fire brick on pavers and walls



OPTION 3 Bedding sand layer on pavers



OPTION 4 Bedding sand layer on Gator Base



8" (20 cm) bedding sand on Gator Base • • Gator Base



What is Gator Base?

- Manufactured using lightweight high-density polypropylene
- Has an R-Value of 3.6 which acts as a thermal blanket
- Is extremely durable and will not degrade in the ground
- Equivalent to 288 lb (130 kg) of crushed stone
- Designed with a tongue and groove system LOCK-N-GO
- Replaces 6" (15 cm) of compacted crushed stone
- Evacuates water through the channel and holes
- Designed for pedestrian applications only

Water evacuates through sloped channels and holes





Dimensions: 24" x 36" (60 cm x 90 cm) Under License from Brock International Patented and Patents Pending: www.brockpaverbase.com




Sand or ASTM No. 9 Stone can be used under Gator Base panels



Replaces 6" of crushed stone!

Gator Base saves hours of work!



6.6 LB (3 KG) GATOR BASE

1440 lb (653 KG) OF CRUSHED STONE

- 5 units of Gator Base covers
 29.4 sq.ft. (2.7 sq.m.) and weighs 6.6 lb (3 kg)
 = Installed within minutes!
- 29.4 sq.ft. (2.7 sq.m.) filled with 6" (15 cm) of crushed stone weighs 1440 lb (653 kg)
 = Hours of work!



Why use Gator Base?

- Save 6" (15 cm) of extra excavation
- Save on cost of truck and driver on the road
- Save on wear and tear on machinery

When and Where to use Gator Base?

- Installing large format pavers and slabs
- Staging pavers throughout the Gator Base
- Avoid stepping on setting bed
- Causing less disturbance and destruction to the property

- Save on costly dumping fees
- Save on overall installation time
- Save minimum 20% on labor costs
- Replaces a traditional granular base
- Completing job minimum 20% faster
- Tolerant against rain showers
- Material storage is prohibited in streets



Pathway



Narrow Areas



Patios



WATCH OUR MUST-SEE VIDEOS AT



IT'S A BETTER INSTALLATION









XTRA PERFORMANCE ADHESIVE

POLYURETHAN



FASTEST SETTING HARDSCAPE ADHESIVE !

GATOR BLOCK BOND XP

Xtra Performance Polyurethane Adhesive

Formulated for

- Overlays and pool copings
- Steps and wall caps
- Fire pits up to 204°C (400°F)
- Retaining walls
- Masonry units
- Wet cast and natural stones
- Concrete pavers and bricks
- Dry and damp surfaces

Xtra fast cure time **Xtra** bond strength **Xtra** durability




GATOR STONE BOND





Gator Stone Bond is available in the states of California, Nevada, Texas and Arizona



Gator Stone Bond Liquid Stone Stabilizer

are a unique blend of acrylic polymers designed to bind together a wide variety of small aggregates commonly referred to as DG (decomposed granite): pathway mixes, crusher runs, concrete sand, etc.

Benefits

- Ready to use right out of the container
- Easy-to-apply one-coat application
- For residential and commercial use
- Reduces dust, gravel migration and erosion
- Allows the use of patio/ pathway year-round
- No special tools or skills required to build
- Build using local aggregates (stone mixes such as 3/8 minus, 1/4 minus or 3/16 minus)
- Will not harm plants or aquatic life
- EPA-compliant

GATOR ROCK BOND

 Gator Stone Bond is available in the states of California, Nevada, Texas and Arizona





Gator Rock Bond is a singlecomponent binder that creates a durable, permeable, and decorative surface when mixed with riverstone. Great for garden pathways where erosion and drainage are a concern.

Features

- Porous and permeable
- Keeps stones in place
- Reduces maintenance
- and clean-up
 Durable in extreme conditions

Rock and Binder Kit

Includes one component liquid binding agent (1/2 quart/473 ml) and 3/8" riverstone (40 lb/18.2 kg).

Liquid Binding Agent

One component liquid binding agent (1 gallon/3.78 liters).

Types of rocks that can be used with Gator Rock Bond: Granite • Limestone • Marble (1/8" to 3/8"). These rocks have to be clean and strong (not brittle), free of dust and 100% dry.





Gator Edge **Rigid and Flex**






• Great lateral support

Features

- Makes defining alleys, driveways or sidewalks easier
- Made with 100% polypropylene or polyethylene for strength and flexibility
- Gator Edge Rigid and Flex can be interconnected with the "Twist & Lock" system
- For thin pavers and slab applications, use Gator Edge Mini
- For tile applications, use Gator Tile Edge
- Gator Screws are used to fasten Gator Tile, Mini, Flex or Rigid edge to the Gator Base
- Edge can be fastened with nails
- All Gator Edge products are 8 linear feet



Gator Screws are used to fasten Gator Tile, Mini, Flex or Rigid edge to the Gator Base

Gator Base Screws 50 screws per pack | 20 packs per box



Gator Tile Edge

5/8" (15 mm) height

XTreme Edge

The Ultimate reinforced 3D Micro-Fiber mesh Structural Edge.

Ideal for

- Traditional, open graded and permeable applications
- Overlay and Gator Base applications
- Pedestrian and vehicular use
- Concrete pavers, slabs, natural and wet cast stone applications

Features


- High-performance polymers for added strength
- Reinforced with 3D micro-fiber mesh
- Continuous lateral support matrix
- Freeze and thaw resistant

HIGH-PERFORMANCE POLYMERS FOR ADDED STRENGTH FORMULATED FOR BETTER WORKABILITY **CONTINUOUS LATERAL SUPPORT MATRIX**

Xtreme Edge VS Concrete Mix

- **2X** Stronger
- **2X** Faster setting time
- Easier and faster to install

Applications





Open Graded

SCAN TO

LEARN MORE



SELECT THE RIGHT

NO MEMORY - STAYS FLAT LIKE NO OTHER!



GG 30-30 BIAXIAL STAIRCASES AND HIGH RETAINING WALLS





Features


- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Ageing-resistant
- High tensile strength
- Adds strength, stability and longevity
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Applications

- Staircase internal structures
- Raised patio internal structures
- Retaining wall structures
- Soil stability
- Erosion control
- General landscape
 - GG 30-30

GATOR GRIDS STAYS FLAT WHEN UNROLLED

BIAXIAL AND PLIABLE



Gator Grid Placement Disclai

uator and vaccement bischamer The soil composition may vary from location. Global stability of the soil has not been considered. It is the owner's responsibility to take into consideration the soil parameters indicated on the label and to ensure that the soil's properties meet construction standard A soil analysis must be done before starting any wall project. Before the construction of your segmental valial and before using any type of Gator Grid and estabilishing the placement, consult a qualified local engineer and obtain a stamped plan. To ensure the structural integrit of your segmental retaining valial, follow manufacturer instructions and installation steps for the construction of your wall. These placement tables are not to be used on multi-tiered walls or in areas with excess water runoff, seepage or springs, unless first otherwise confirms by a qualified local engineer. Additional Gator Grid than what appears on the label may be required in your application. This document should not be construed as engineering advice. We assume no liability of any kind if the instructions in the present disclaimer are not to be used to the product is different than the one for which it is intended.

Features

- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Ageing-resistant
- High tensile strength
- Adds strength, stability and longevity
- Easily combined with gravel and soil
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Applications

- Raised patio internal structures
- Retaining wall structures
- Multi-level wall structures
- Roadway structure
- Parking space structure
- General landscape
- Soil stability
- Erosion control





GATOR GRID







SELECT THE RIGHT



GF3.5 NON-WOVEN PATIOS AND WALKWAYS



Features

lbf

- Hydrophilic, allows high-water flow (165 gallons per minute per foot)
- Drainage and filtration
- Soil separation
- Erosion control

Applications

- Staircases
- Patios and walkways
- Low retaining wall
- Garden and hardscape covering




Features

- Hydrophilic, allows high-water flow (135 gallons per minute per foot)
- Drainage and filtration
- Soil separation
- Erosion control


Applications

- Staircases
- Patios, walkways and driveways
- Retaining wall
- Gator Base applications
- Garden and landscape covering



GF5 **WOVEN FABRIC**







Features


200

- Reinforcement
- Soil separation
- High tensile strength
- High load capacity
- Extra resistant to punctures and tears

- ApplicationsDriveways and parking lots
- Poor soil foundation reinforcement (clay soils)
- Leveling pad retaining wall foundation
- Permeable foundation applications of driveways, parking spaces and more














20

GATOR FABRIC



SELECT THE RIGHT

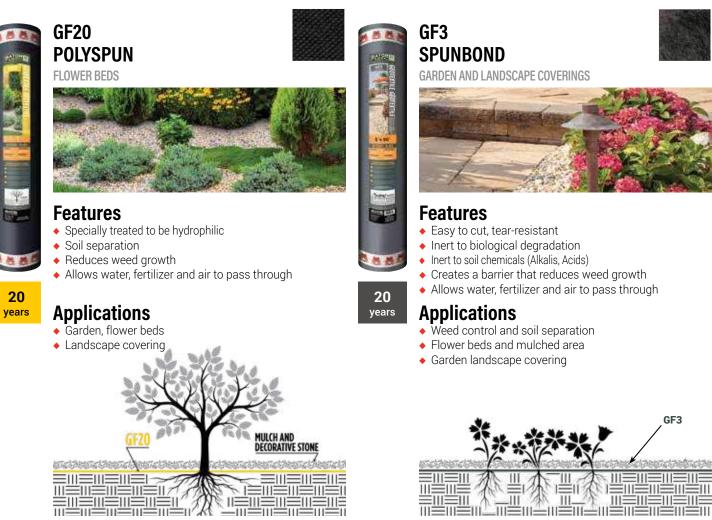

CROSS-REFERENCE CHART FOR GATOR FABRICS AND GATOR GRIDS

	Alliance Gator		Comparative Products								
Category	Product	Application	SRW	Tencate	Hanes	Strata	Texel (Lydall)	Synteen	Tensar	Carthage Mills	Geostar
Gator Fabric	GF 3.5 (80 Lbf) Non-Woven	Drainage and Filtration	LS3	Mirafi 135 N	Terratex no. 3	StrataTex ST-131	TEX-500	N/A	N/A	FX-30HS	Geostar GN 31
	GF 4.4 (100 Lbf) Non-Woven	Drainage and Filtration	NW4	Mirafi 140 NC	Terratex SD/4.5	StrataTex ST-140	TEX-700N	N/A	N/A	FX-40HS	Geostar GN 40
	GF 5 (200lbf) Woven	Stability and separation of subgrade in paver or wall foundations	SS5	Mirafi 500 X	Terratex GS	StrataTex SW-200	SX-90T	N/A	N/A	Slit Film FX-55	GeoWeave 40
	GF 3 (20 years) Spunbond	Separation and Weed Control	SB3	N/A	ProSteel+/ ProSilver+	N/A	N/A	N/A	N/A	LX-SB30	N/A
	GF 20 (20 years) Polyspun	Separation and Weed Control	Polyspun 15 years	N/A	Pro Ion 20 years	N/A	N/A	N/A	N/A	N/A	N/A
Gator Grid	GG 30-30 (2052 lbf/ft) Biaxial	Segmental retaining wall, erosion control	3 series Biaxial	Miragrid 2XT Biaxial	Terragrid SX-3030 Biaxial	Microgrid/ SG-150 Biaxial	BX-1200 T2 Biaxial	Synteen SF 11 Biaxial	BX-1500 Biaxial	GBX-3030 Biaxial	MG-100 Biaxial
	GG 50-50 (3420 lbf/ft) Biaxial	Segmental retaining wall, erosion control and more	5 series Uni-Axial	Miragrid 3XT Uni-Axial	N/A	Stratagrid 200 Uni-Axial	BX-1500 T3 Biaxial	Synteen SF 35 Uni-Axial	UX-1100/ UX-1400 Uni-Axial	GX-300 Uni-Axial	HP-200 Uni-Axial









SOLVENT BASED SEALERS FOR DRY CAST CONCRETE PAVERS

Gator Sealers are made from acrylic-based polymers. Gator Sealers penetrates deep into the concrete pavers, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt. Gator Seal Wet Look and Satin Look are specifically formulated to be used on unsealed surfaces only. Gator Seal Resealer will penetrate the formula of the existing solvent based sealer and reactivate the molecules to create a rejuvenated seal and protect the surfaces.

Features

- Easier to clean and maintain
- Solvent-based
- Rain-safe after 90 minutes Works between 60°F (16°C)
 - and 85°F (29°C)

Helps resist

- Corrosion from de-icing salt
- Effects from UV rays
- Motor oil and grease stains



Wet Look

- High Gloss
- Vibrant Color Enhancer
- Joint stabilizer
- Film Former



Satin Look

- Low Gloss
- Subtle Color Enhancer
- Joint stabilizer Film Former



Resealer

Revives Look







WATER BASED SEALERS FOR DRY CAST CONCRETE PAVERS

Hybrid High Gloss +color ENHANCEF

Hybrid Low Gloss +color enhancer

Gator Hybrid Sealers + Color Enhancer

used to seal concrete pavers. It penetrates deep

corrosion of de-icing salt.

into the concrete paver pores, reducing the oil and

Gator Hybrid Sealers + Color Enhancer are 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



- Gator Hybrid Sealers are 100% pure high-grade acrylic Helps resist corrosion from de-icing salt, effects from UV rays, motor oil and grease stains dirt penetration, as well as protecting them from the
 - Works above 40°F (4°C)
 - Film former

- Will not discolor
- Rapid Installation
- Low VOC
- Rain-safe after 24 hours





S

Mature SERIE

Natural Stone Zero Gloss

+COLOR ENHANCER



Gator Seal Signature Series for Natural Stone is a color enhancer and is made of silicone-based polymers. This sealer penetrates deep into the natural stone, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

Features

- Non film-former
- Vibrant color enhancer
- Apply on dry surface only
- Works at above 40°F (4°C)
- Rain-safe after 24 hours
- Easier to clean and maintain
- For use on salt-water pool patio areas
- Water-based, Zero Gloss
- Darkens the color (wet look)
- UV-resistant
- Stain protection


Natural Look Finish Zero Gloss

MULTI-PURPOSE



Gator Seal Signature Series Natural Look is made from fluorochemical polymers. This sealer penetrates deep into the concrete pavers, walls, masonry and natural stones, reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

- Non film-former
- Applicable on damp surfaces
- Works above 32°F (0°C)
- Rain-safe after 24 hours
- Zero VOC
- Water based sealer
- Helps resist stains up to
- . 10 years

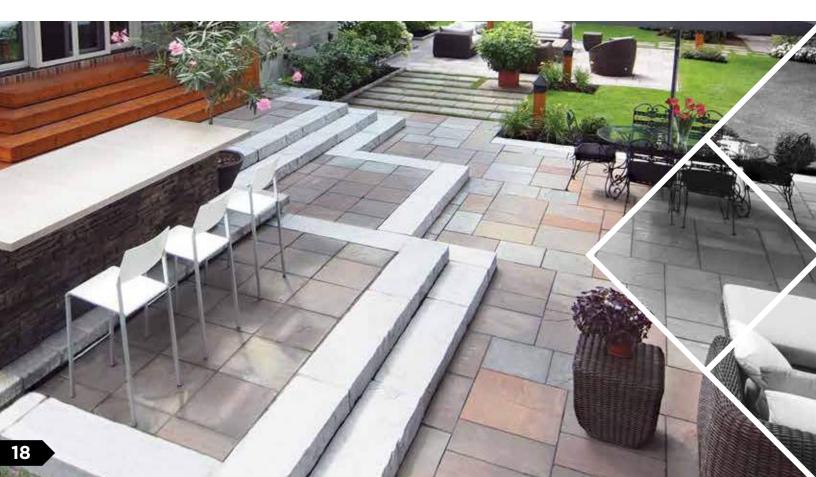







Efflorescence '

Features

- Removes efflorescence from the surface of concrete pavers and natural stones
- Cleans pavers prior to sealing
- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



Shampoo

Features

- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



Sprayer

Features

- Easy to use, provides an accurate water-to-cleaner mix
- Connects directly to your garden hose
- Use with Gator Shampoo or Gator Efflorescence Cleaner



XP Oil & Grease Remover

Features

- No scrubbing, no rinsing, no mess
- Just shake it, spread it on the stain, let it dry and sweep it off
- Easily lifts and absorbs embedded oil stains as it dries from liquid to powder



Rust Remover

Features

- Removes the spots caused by steel, water build-up, fertilizer, etc
- Contains no muriatic acid
- Easy to use



Rubber, Paint & Tar Remover

Features

- Washes off with water
- Easy to use
- Emulsifies some sealers
- Remover and cleaner for bonding agent
- Cleans sealing tools such as sprayer



Gatorene

- Degreases and cleans tools
- Thins specialty coatings
- Flushes metal sprayers



GATOR U EDUCATION STUDIO

Find all seminars, courses and capsules created just for you!



AllianceGator.com