

Product Catalog




Residential Stormwater Management

Commercial Stormwater Management

Professional Irrigation

Flow Management



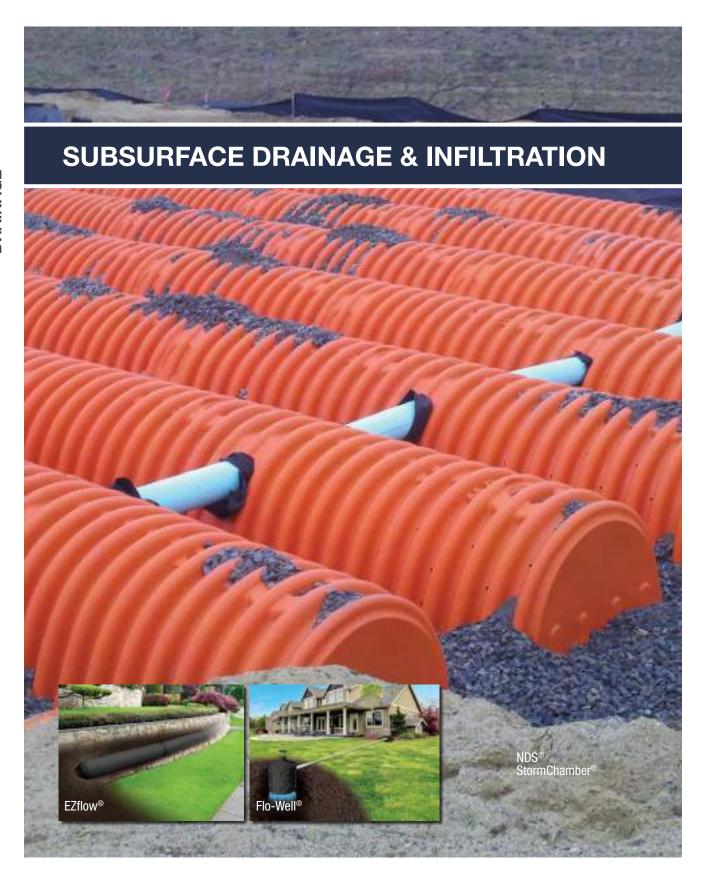

THE NDS SOLUTION

Whether you need a dry well, French drain or infiltration trench, NDS has you covered with innovative and proven subsurface drainage and stormwater infiltration products. EZflow® French drain system, NDS® StormChamber® and Flo-Well® dry well provide trusted performance for multiple applications and are lightweight and easy to install. These engineered solutions are proven time-and-labor savers that outperform traditional systems in flow through and storage capacity. When performance and sustainability matter, NDS solutions are the preferred choice of contractors, engineers and landscape architects. EZflow®, NDS® StormChamber® and Flo-Well® are made in the USA and each contribute to project LEED credits when used as part of the stormwater management design and by contributing to the proportion of recycled materials.







EZflow®

EZflow® offers an engineered and gravel-free alternative to a traditional French Drain system. EZflow® can be used to lower subsurface groundwater elevations; protecting property and improving the health of playing fields and planted areas. It can also be used as an infiltration trench for managing stormwater runoff. Available in multiple diameters with or without pipe, this versatile product is an effective component of subsurface drainage and infiltration systems.

- Installs in half the time of traditional gravel systems
- Better flow capacity than traditional stone-and-pipe systems
- Up to H-10 load rating with 12" of compacted soil cover
- · Over 100 million linear feet installed

NDS® StormChamber®

Stormwater chambers provide a lower cost alternative to drainage pipes for conveyance, with added benefits of groundwater recharge and water quality enhancement. Stronger and easier to maintain, NDS® StormChamber® is the ideal solution for stormwater detention and/or infiltration, providing easy installation and design flexibility to meet target stormwater runoff rates, volume control and water quality requirements.

- Thermo-formed high density weight polyethylene HMWPE material won't crack
- 100-year life expectancy Longest on the market
- Saves time and money offers the lowest installed cost
- Proprietary SedimenTrap[™] offers centralized sediment control, gathering sediment and pollutants in one place for quick removal by vacuum truck.

Flo-Well®

Flo-Well® engineered dry well presents an easy to install and sustainable solution for managing stormwater runoff. Flo-Well® is a gravel-free alternative to a traditional dry well with up to 250% more detention volume. Used independently or as part of a larger system, Flo-Well® units collect and detain stormwater allowing for groundwater recharge. Units are modular and can be connected in series or stacked to meet a variety of project needs.

- Up to 50 gallons of detention volume per unit
- · Connect units in series for larger volumes or stack for reduced footprint
- Fast and easy installation with no heavy equipment or gravel needed
- · Manufactured from 100% recycled materials



EZFLOW®: A BETTER FRENCH DRAIN



Gravel-free installation provides up to 50% labor savings over traditional systems


Better flow through and detention volume than traditional systems

Durable with a 100-year materials lifespan when installed

Projects qualify for LEED credits

EZflow® Drainage Bundles


EZflow® drainage bundles are 10 feet in length with a slotted pipe surrounded by expanded polystyrene aggregate and enclosed in geotextile mesh. Configurations are available in 7-inch bundles with or without a 3-inch pipe, 10-inch bundles with or without a 4-inch pipe, and 15-inch bundles with or without a 6-inch pipe. Accessories include 3-inch, 4-inch, and 6-inch internal couplers and end caps. EZflow® bundles can also be used with internal ree and internal wyes. The 15-inch bundles are available with the pipe located in the center or bottom of the bundle for varying application. Unless specifically required by code or other requirement, the pipe can be either centered or at the bottom of the bundle.

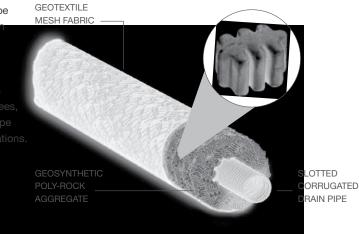


Applications




French/Interceptor Drains



Planter/Retaining Walls



Foundation Drains



Basement/Crawlspace

EZflow® drainage systems are appropriate for a wide range of applications and are a convenient alternative to traditional stone and pipe drainage, storage and infiltration systems. EZflow® drainage systems can be used as a substitute for stone in most applications where the stone is not utilized for structural support. A professional engineer, landscape architect or other qualified design professional should be consulted for complex applications.

Product selection is relative to the desired application and benefits from establishing anticipated flow into, through and out of a proposed drainage system configuration. Selection considerations include: bundle sizing and storage volume, the presence or absence of pipe, pipe size and location within the bundle, and arrangement of bundles. Design factors may include: length of system, watershed area, soil type and permeability, groundwater levels and system discharge opportunities. EZflow® drainage storage volumes and pipe discharge rates are listed on the next page.

EZFLOW® ENGINEERED FRENCH DRAIN

EZflow® Gravel-Free French Drain





Part No.	Description	Color	Bundle size/ Linear Feet	Wt. per Bundle (lbs.)	Product Class	Specifications
EZ-0701F	7" mesh with 3" slotted pipe (center)	Black	90	32.4	11RP	10 ft. polyethylene slotted drain pipe surrounded by
EZ-1001F	10" mesh with 4" slotted pipe (center)	Black	50	29.5	11RP	100% recycled polystyrene aggregate and enclosed
EZ-1501F	15" mesh with 6" slotted pipe (center)	Black	20	26.0	11RP	in 30-sieve polyethylene geotextile mesh.
EZ-0701A	7" mesh without pipe – aggregate only	Black	90	18.0	11RP	10 ft. segment of 100% recycled polystyrene
EZ-1001A	10" mesh without pipe – aggregate only	Black	50	13.5	11RP	aggregate only, enclosed in 30-sieve polyethylene
EZ-1501A	15" mesh without pipe – aggregate only	Black	20	12.4	11RP	geotextile mesh.

EZflow® Internal Couplings & End Caps





Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
3C05	3" Corrugated Internal Coupling	Black	60/box	0.30	11RP
4007	4" Corrugated Internal Coupling	Black	36/box	0.30	11RP
6007	6" Corrugated Internal Coupling	Black	12/box	0.80	11RP
3C06	3" Corrugated End Cap	Black	33/box	0.30	11RP
4C06	4" Corrugated End Cap	Black	21/box	0.50	11RP
6006	6" Corrugated End Cap	Black	15/box	0.50	11RP

Storage & Flow for EZflow® Drainage Bundles (45% void space among consolidated EPS aggregate)

Pipe Bundles								
Product	Storage Volume (gallons/10 ft. bundle)	Flow Capacity (gpm @ 1% slope)						
EZ-0701F	11.4	80.8						
EZ-1001F	21.5	130.9						
EZ-1501F	45.8	345.0						





Aggregate-Only Bundles								
Product	Storage Volume (gallons/10 ft. bundle)	Flow Capacity (gpm @ 1% slope)						
EZ-0701A	8.8	37.1						
EZ-1001A	17.2	75.7						
EZ-1501A	36.5	170.3						







NDS® STORMCHAMBER®: THE MOST COST-EFFECTIVE CHAMBER SOLUTION



NDS® StormChambers® are subsurface structures that are used to collect, retain and discharge stormwater on commercial and residential sites. They provide a lower cost alternative to drainage pipes for conveyance, with the added benefits of groundwater recharge and water quality enhancement.

Stronger & Easier to Maintain - High Volume Stormwater Retention

NDS® StormChamber® is the most cost-effective chamber solution on the market. Thermo-formed from high density weight polyethylene HMWPE material, it offers superior strength that won't crack even under the most extreme environments. Designed for fast installation and simple maintenance, NDS® StormChamber® is ideal for roadways, parking lots and fields and can stack, allowing for deeper installation and a smaller footprint.

Key Benefits:




Strong, Flexible & Durable

- Meets H-20 standards
- Up to 16' cover when deep installs are required for the 34". Up to 12' for the 44"
- 100-Year Life Expectancy
- Withstands the most extreme environments
- Material bends instead of breaks, giving it a brittleness temperature of -107° F vs. industry average of -2° F



Fast Installation

- Built-in end walls
- No header pipe manifold system required
- Flexible design
- · Lowest installed cost



Simple Maintenance

- Differentiated and centralized sediment control
- SedimenTrap[™] gathers sediments and other pollutants in one place for quick, easy and inexpensive removal by vacuum truck



Stacks


- 34" Chambers: Capable of 3-layer stacking
- 44" Chambers: Contact NDS DesignWorx for any projects that may need stacking
- We offer expert site-specific design guidance based on 20 years of successful completion of projects

NDS® STORMCHAMBER®


NDS® StormChamber®



Part No.	Description	Color	Length	Width	Height	Weight (lbs.)	Per Pallet	Product Class
SC-3475W-S-0	75CUFT START CHAMBER100X60X34	Orange	100"	60"	34"	90	40	10SC
SC-3475W-E-0	75CUFT END CHAMBER100X60X34	Orange	100"	60"	34"	90	40	10SC
SC-3475W-M-0	75CUFT MIDDLE CHAMBER100X60X34	Orange	100"	60"	34"	90	40	10SC
SC-3475W-C-0	75CUFT CLOSED CHAMBER100X60X34	Orange	100"	60"	34"	90	40	10SC
SC-3475-S-0	75CUFT START CHAMBER102X60X34	Orange	102"	60"	34"	100	30	10SC
SC-3475-E-0	75CUFT END CHAMBER102X60X34	Orange	102"	60"	34"	100	30	10SC
SC-3475-M-0	75CUFT MIDDLE CHAMBER102X60X34	Orange	102"	60"	34"	100	30	10SC
SC-3475-C-0	75CUFT CLOSE CHAMBER102X60X34	Orange	102"	60"	34"	100	30	10SC
SC-44105-S-0	105CUFT START CHAMBER90X78X44	Orange	90"	78"	44"	120	20	10SC
SC-44105-E-0	105CUFT END CHAMBER90X78X44	Orange	90"	78"	44"	120	20	10SC
SC-44105-M-0	105CUFT MID CHAMBER90X78X44	Orange	90"	78"	44"	120	20	10SC
SC-44105-C-0	105CUFT CLOSE CHAMBER90X78X44	Orange	90"	78"	44"	120	20	10SC
SC-1820-S-0	20CUFT START CHAMBER 18"	Orange	100"	37"	18"	53	45	10SC
SC-1820-E-0	20CUFT END CHAMBER 18"	Orange	100"	37"	18"	53	45	10SC
SC-1820-M-0	20CUFT MIDDLE CHAMBER 18"	Orange	100"	37"	18"	53	45	10SC
SC-1820-C-0	20CUFT CLOSED CHAMBER 18"	Orange	100"	37"	18"	53	45	10SC
SC-ST	SEDIMENT TRAP	Orange	47" OD	-	21	3	4	10SC
SC-2412P	24" x 12" HDPE Pipe	Orange	24"	-	12"	9.25	20	10SC
SC-NWFF-500	FILTER FABRIC NON-WOVEN LIGHT	Orange	360'	12.5'	1.5' OD roll	220	3	10SC
SC-WFF-75	STABILIZATION FABRIC WOVEN MEDIUM	Orange	75'	7.5'	0.75' OD roll	75	16	10SC
SC-FL-10	10" FRAME AND LID	Orange	20" OD	-	3"	24	-	10SC
SC-3020P	30" X 20" HDPE PIPE	Orange	36" OD	-	20"	45	4	10SC

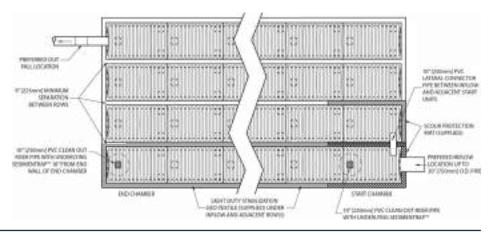

NDS® StormChamber® Elevated View

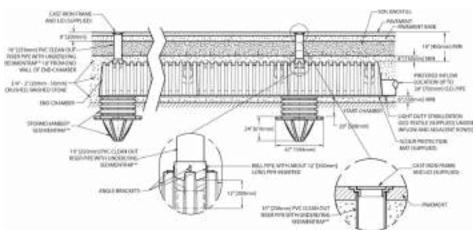



FLO-WELL®: A BETTER DRY WELL



With the Flo-Well®, water can now be infiltrated into the subsoil rapidly and easily. Unlike competitive systems, there is no need for piping systems to transport stormwater to a far-off discharge point, large heavy equipment, considerable excavation of current landscaped areas, nor large labor costs that those systems incur. With Flo-Well, water infiltration is now easier than ever.

Options

Larger 9" or 12" grates can be added to Flo-Well to manage surface water.

This option is ideal for draining:
Golf course areas prone to puddling

Playground areas under slides and swings

Outdoor drinking fountain runoff

Outdoor showers at beaches

Wash-down areas

Ideal as a stand-alone drain:

Disturbs only 4 square feet of turf to install

Requires less than 10 cubic feet of soil removed to bury

Measures only 24" in diameter by 28.75" high

Weighs only 22 pounds

Holds over 48 gallons. Or, connect to existing system for increased drainage capabilities


Ideal as a stand-alone reservoir:

Collect and hold rainwater for lawn and garden irrigation (used with a pump connected to a garden hose)

Connect Flo-Well to rain gutters using a catch basin & grate below each downspout (see drawing)


Ideal solution for arid areas impacted by drought

Reservoir for pond and waterfall recirculation pumps



Stackable & Expandable

Flo-Well® can be used individually, connected in series or in any array, and can be stacked up to 4 units high (with center support pipe).









Stacked


Applications



For gutters and downspouts



Install with sump pumps



Eliminates puddles




Backwash tank


FLO-WELL® ENGINEERED DRY WELL



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWAS24WH	24" diam. x 28.75"H Flo-Well® Stormwater Leaching System	Black	1	18.96	10FW	NDS #FWAS24WH structural foam polyolefin round drywell system
	Includes 3 side panels, 1 top component	i.			with UV inhibitors. 50 gal. storage capacity.	
	Fits 4" Sch. 40 Pipe and 4" DWV Pipe.					capacity.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWAS24CWH	24" diam. Flo-Well® Cover	Black	2	5.92	10FW	Structural foam polyolefin round
	Use with #FWAS24.					drywell system cover with UV inhibitors. 24-1/4" dia., 4-1/2" height, 3/4" outer lip, 4.5" center knockout fits NDS #FWSD69, std pipe and 4" Sch. 40 pipe.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWSPS3WH	Flo-Well® Side Panels/Extension Only	Black	1	4.35	10FW	Structural foam polyolefin side panels
	Includes 3 side panels; makes 1 round d (May also be used as a durable compost bin)	rywell.				with UV inhibitors with 22 1-1/2" knockout leaching ports and 4 4.5" knockout inlet/outlet ports per panel. 0.75" lip for firm stacking.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWBP24	24" diam. Flo-Well® Bottom	Black	5	3.41	10FW	Structural foam polyolefin round
	Fits #FWAS24. (Not included in #FWAS24 kit)					Flo-Well® bottom with UV inhibitors. 24" diameter with six 1-1/2" leaching ports. Collects debris for easy cleanout.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWSD69	4" Sch. 40 Surface Drain Inlet with Grate	Black	8	1.85	10FW	Structural foam polyolefin 6" grate with 4" inlet with UV inhibitors. 6"
	Fits #FWAS24 and #FWAS24C. ADA Compliant.					diameter at inlet. 9" high. 4.5" OD fits Sch. 40 PVC fittings. Open surface area 8.22 square inches. 25.15 GPM.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
FWFF67	Porous Filter Fabric Wrap for Flo-Well®	Black	1	0.35	10FW	7' long x 2' wide to surround Flo-Well®
	Use with #FWAS24.					Drywell System. Non-woven fabric. Weight 1 oz. Mullen burst 175 psi. 200 GPM flow-through.





NDS catch basins and grates collect surface water while minimizing the amount of debris entering the system

Available in a range of sizes from 6" round to 24" square, and with various grating and filter options for commercial and residential systems.

NDS Drainage Solutions

NDS offers a complete line of catch basins and grates for residential and commercial stormwater management solutions. NDS catch basins have sump areas that collect debris and prevent clogging of the pipeline, and grates are available in a variety of patterns and colors to blend in with surrounding surfaces. Depending on the size of the round, square, or atrium grates, they may fit directly into a riser of pipe, sewer and drain fitting, or our catch basins.









83 GPM

Small Grates


Spee-D® Basin


Large Catch Basin


Adapter

Spee-D® Basins

Use our compact 6" round Spee-D Basins with grates to collect runoff water while its sump area collects debris and prevents clogging. Also use Spee-D Basins with 6" Pop-Up Emitters to provide a point of discharge or overflow in a drainage system.







Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
101	1 - 3" and 4" Locking Outlet	Black	10	1.60	10ND	6" styrene catch basin
101ATBLKIT	Spee-D Basin with 6" Black Atrium Grate	Black Grate	8	n/a	10ND	with locking outlet. 68 GPM per outlet capacity.
101GRKIT	Spee-D Basin with 6" Green Round Grate	Green Grate	6	n/a	10ND	
101SQGRKIT	Spee-D Basin with 9" x 9" Green Square Grate	Green Grate	8	n/a	10ND	
201	3" and 4" Locking Outlets*	Black	10	1.83	10ND	101 201
	Spee-D Basins and kits fit 3" or 4" Sewer & Drain Pipe, Pipe. Use new Spee-D Riser or 6" Sewer and Drain Pipe silicone to make water-tight connections. Locking Outle	Kits contain 1-outlet Spee-D Basin & Grate as described.				


Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
101R	Spee-D Basin Riser	Black	12	1.07	10ND	6" Riser for Spee-D Basin.			
	Use with any Spee-D Basin to add from 2" to 6" to to 1" increments. Compatible with all grates that fit Spe	Styrene.							

Part No.	Description	Color	Qty.	(lbs.)	Class	Specifications	
250	2 - 4" 90° Outlets	Black	12	1.64	10ND	6" styrene catch b	
300	3 - 4" Outlets	Black	12	1.82	10ND	with pipe outlets. 8 per outlet capacity	
350	4 - 4" Outlets	Black	12	2.00	10ND	ND O	
	Fit 4" Sewer & Drain pipe and fittings, 4" SCH40 and Co or 6" Sewer & Drain pipe as riser extension.	" Sewer & Drain pipe and fittings, 4" SCH40 and Corrugated Pipes. Use Spee-D Basin Riser 101R " Sewer & Drain pipe as riser extension.					


9" Catch Basin Series



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
900FF	9" Catch Basin Filter	Blue Frame/ Black Bag	8	0.06	10ND	Polypropylene Frame Fabric is non-woven			
	Compatible with these basins: 900, 900-4 and 916		geotextile 956 PM/SF.						




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
900BLKIT	9" x 9" Catch Basin Kit	Black Grate	4	4.90	10ND	9" x 9" tapered Catch Basin. Polypropylene. Kits include 2-opening Catch Basin, Grate, Screws, 2 Outlets and 1 Plug.
900GRKIT	9" x 9" Catch Basin Kit	Green Grate	4	4.90	10ND	
900KITDISP	9" x 9" Catch Basin Kits in Display Box	Blk/Grn Grates	8	39.2	10ND	
900	9" x 9" Catch Basin 2-opening	Black	4	2.18	10ND	
900-4	9" x 9" Catch Basin 4-opening	Black	4	2.00	10ND	
	Requires either #1206, #1242, #1243, #1245 or #1	DISP includes 4 kits with black grates and 4 green				




Part No.	Description	Color	Pkg. Qty.		Product Class	Specifications			
916	9" x 9" Catch Basin Riser	Black	4	1.75	10ND	6" Riser for 9" x 9 Catch			
	Use with 9" x 9" Catch Basin Series. Stacks on top Can be cut to size.		Basin. Styrene.						



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
900DSG	9" x 9" Downspout Defender Grate	Black	4	10ND	9" x 9" Downspout Grate,			
	Receives downspouts from 2" to 4" round or square Fits all NDS 9" square Catch Basins, Risers and Low		Structural Foam Polyolefin with UV inhibitors. 146 GPM.					
900DSGKIT	9" x 9" Low-Profile Downspout Kit	Black	4	2.25	10ND	Kit includes 9" Downspout		
	Receives downspouts from 2" to 4" round or square Pipe, 4" Sewer and Drain Fittings, 4" Schedule 40 Pi	Defender Grate, 930 low- profile adapter and 1243 outlet adapter. 146 GPM.						




	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
ç	981	9" x 9" Atrium Grate	Black	6	0.87	10ND	9" Structural Foam Polyolefin Dome Atrium Grate with UV inhibitor.		
Ś	991	9" x 9" Atrium Grate	Black	6	0.87	10ND			
		Use with 9" x 9" Catch Basin Series.					Open surface area 31.50 square inches. 96.36 GPM.		




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
980	9" Square Grate	Black	8	1.50	10ND	9" Square Structural Foam Polyolefin Grate with UV inhibitor. Open surface area 37.49 square inches. 114.69 GPM.	
990	9" Square Grate	Green	8	1.50	10ND		
999	9" Square Grate	Gray	8	1.50	10ND		
999S	9" Square Grate	Sand	8	1.50	10ND		
	Use with 9" x 9" Catch Basin Series. NDS #980, 990, 999, 999S: Class A Load Rated. ADA Compliant. NDS #930B: Class B Load Rated.						
	(see page 79). ADA Compliant.						




9" Catch Basin Series (continued)




Part No.	Description	Color		Wt. Ea. Ibs.	Product Class	Specifications		
930B	9" Square Brass Grate	Brass	1	5.11	15BR	Open surface area 34.00 square inches. 104.01 GPM. Includes SS Screws.		
	(see page 79). ADA Compliant.							




Part No.	Description		Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
913	9" Square Ductile Iron Grate	Black*	4	7.89	10ND	9" Square Heavy-Duty Ductile Iron Grate. Open surface area 21.70 square inches. 66.38 GPM.		
	Use with 9" x 9" Catch Basin Series. *Painted for shipping & display only; grate will form (see page 79)	iron-oxide patina						




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
915	9" Square Galvanized Steel Grate	Galvanized Steel	4	3.80	10ND	9" Square Heavy-Duty		
	Use with 9" x 9" Catch Basin Series. (see page 79)					Galvanized Steel Bar Grate. Open surface area 61.94 square inches. 189.48 GPM.		




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
930	9" x 9" Low-Profile Adapter	Black	8	0.75	10ND	9" x 9 Low-Profile Adapter. Styrene. Kits contain Low-Profile		
930GRKIT	9" x 9" Low-Profile Adapter with Flat Green Grate and 3" & 4" Universal Locking Outlet	Green Grate	8	n/a	10ND			
	Adapter alone requires #1242, #1243, #1245, #126 Sewer and Drain or Corrugated Pipes (see page 35).	Adapter, 3" & 4" Universal Locking Outlet and Grate as described.						



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
931	9" x 9" Deep Housing Spigot Adapter	Black	10	2.40	10ND	9" x 9" Square Deep		
	Fits 4" Corrugated Pipe.					Housing Spigot Adapter. Styrene.		
	Use #933 to adapt to 4" Sewer and Drain Pipe.							



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
933	Adapter Bushing	Black	20	0.30	10ND	Styrene.	
	Bushing adapts #931 to fit 3" and 4" Sewer and Dr.	ain Pipes and 3" Corru	gated Pipe.				




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
932	9" x 9" Low-Profile Housing Adapter	Black	8	1.13	10ND	NDS #932, 9" x 9" Square
	Fits 6" Spee-D® Basin and 6" Sewer and Drain Pipe & Fittings.				Low-Profile Housing Adapter with 6" Outlet. Styrene.	


12" Catch Basin Series




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1200FF	12" Catch Basin Filter	Blue Frame/ Black Bag	8	0.10	10ND	Polypropylene Frame Fabric is non-woven
	Compatible with all NDS 12"x12" grates except pla	astic botanical 1218, 12	218GR, 1218	BGY, 1218S.		geotextile 956 PM/SF.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1200NGBKIT	12" x 12" Catch Basin, 2 Open Slides	Black	4	4.65	10ND	Adjustable Outlet Catch
1200NGB	12" x 12" Catch Basin	Black	4	3.45	10ND	Basin. Sides adjust to 3 different outlet elevations. Polypropylene basin and styrene sides.
1207	Open Slide for 1200NGB	Black	8	0.60	10ND	
1208	Plug Slide for 1200NGB	Black	8	0.76	10ND	
	Compatible with 12" x 12" Catch Basin Risers an	d Grates.				




	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
	1200BLKIT	12" x 12" Catch Basin Kit	Black Grate	4	7.59	10ND	12" x 12" Tapered Catch
	1200GRKIT	12" x 12" Catch Basin Kit	Green Grate	4	7.59	10ND	Basin. Polypropylene.
	1200KITDISP	12" x 12" Catch Basin Kits in Display Box	Blk/Grn Grates	8	7.59	10ND	Kits include 2-opening Catch Basin, Grate,
-	1200	12" x 12" Catch Basin, 2 Openings	Black	4	4.25	10ND	Screws, 2 Outlets and 1 Plug.
-	1203	12" x 12" Catch Basin, 3 Openings	Black	4	3.75	10ND	DISP includes 4 kits with
	1204	12" x 12" Catch Basin, 4 Openings	Black	4	3.75	10ND	black grates and 4 green
		Requires either #1206, #1242, #1243, #1245, #1266 or #1889 Universal Outlet to connect pipe to basin (see page 35). Bottom cutout can be removed.					



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1216	12" x 12" Catch Basin Riser	Black	8	2.75	10ND	6" Riser for 12" Catch
	Use with 12" x 12" Catch Basin Series. Stacks on top of 12" catch basins to add up to 6"	to top of basin. Can be	cut to size.			Basin. Styrene.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1217	12" x 12" Riser with 2 Openings	Black	4	4.00	10ND	12" Riser with Two
	Nests on top of 12" Catch Basin Series for shallow for more sump area. Requires either #1206, #1242 Universal Outlet to connect pipe to riser.					Openings. Styrene.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1225	12" x 12" Sump Box	Black	4	6.75	10ND	One-piece 12" Sump Box.
	Use with 12" x 12" Grate or #1220 Sump/Valve Bo	x Cover.				Styrene.




12" Catch Basin Series (continued)



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1200DSG	12" x 12" Downspout Defender Grate	Black	8	n/a	10ND	12" x 12" Downspout Grate.		
	Receives downspouts from 2" to 6" round or squar Fits all NDS 12" square Catch Basins, Risers and L					Structural Foam Polyolefin with UV inhibitor. 247 GPM.		




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1280	12" x 12" Atrium Grate	Green	8	1.74	10ND	12" Structural Foam Polyolefin Dome Atrium
1290	12" x 12" Atrium Grate	Black	8	1.74	10ND	Grate with UV inhibitor.
	Use with 12" x 12" Catch Basin Series.					Open surface area 50.60 square inches. 154.79 GPM.




3/8"	Grate	Openings

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1210	12" x 12" Square Grate	Gray	8	2.33	10ND	12" Square Structural
1211	12" x 12" Square Grate	Black	8	2.33	10ND	Foam Polyolefin Grate with UV inhibitor. Open
1212	12" x 12" Square Grate	Green	8	2.33	10ND	surface area 50.76 square inches, 155,28 GPM.
1212S	12" x 12" Square Grate	Sand	8	2.33	10ND	1101103. 100.20 di W.
	Use with 12" x 12" Catch Basin Series.					
	(see page 79). ADA Compliant.					



		-
3/,11	Grate	Openings

Part No.	Description	Color	•	Wt. Ea. lbs.	Product Class	Specifications	
1230B	12" Square Brass Grate	Brass	1	9.24	15BR	Open surface area 42.87	
	(see page 79). ADA Compliant.					square inches. 131.14 GPM. Includes SS Screws.	




↑ ⅓"	
	%" Grate Openings

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1218S	12" x 12" Square Botanical Grate	Sand	8	3.27	10ND	12" Square Structural
1218GR	12" x 12" Square Botanical Grate	Green	8	3.27	10ND	Foam Polyolefin Botanical Grate with UV inhibitor.
1218GY	12" x 12" Square Botanical Grate	Gray	8	3.27	10ND	Open surface area 24.44 square inches. 74.77 GPM.
1218	12" x 12" Square Botanical Grate	Black	8	3.27	10ND	Class B load rated.
839	Stainless Steel Screws, FH #6 x 1-3/4"	Metal	40	n/a	10ND	
	(see page 79). ADA Compliant. Not compatible with 1200FF	filter.				




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1218Cl 629	12" x 12" Square Botanical Cast Iron Grate Stainless Steel Screws, FH #20 x 1-1/2"	Black*	1 40	12.67 n/a	10ND	12" Square Cast Iron Botanical Grate. Open surface area 24.44 square inches. 74.77 GPM. Class B		
	*Painted for shipping & display only; grate will form iron-oxid (see page 79). ADA Compliant.	de patina				load rated.		


12" Catch Basin Series (continued)




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1224S	12" x 12" Square Wave Grate	Sand	8	2.68	10ND	12" Square Structural
1224GR	12" x 12" Square Wave Grate	Green	8	2.68	10ND	Foam Polyolefin Wave Grate with UV inhibitor.
1224GY	12" x 12" Square Wave Grate	Gray	8	2.68	10ND	Open surface area 25.67
1224	12" x 12" Square Wave Grate	Black	8	2.68	10ND	square inches. 78.53 GPM. Class B load rated.
839	Stainless Steel Screws, FH #6 x 1-3/4"	Metal	40	n/a	10ND	
	(see page 79). ADA Compliant.					




Part No.	Description	Color	Qty.	(lbs.)	Class	Specifications
1224CI	12" x 12" Square Wave Cast Iron Grate	Black*	1	13.90	10ND	12" Square Cast Iron
629	Stainless Steel Screws, FH #20 x 1-1/2"	Metal	40	n/a	10ND	Wave Grate. Open surface area 25.60 square inches.
	*Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant/Heel-proof.					78.31 GPM. Class B load rated.
			Pkg.	Wt. Ea.	Product	
Dort No	Description	Color	Otty	(lbc.)	Close	Charifications



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1213	12" x 12" Square Ductile Iron Grate	Black*	1	15.30	10ND	12" Square Heavy-Duty
	Use with 12" x 12" Catch Basin Series. *Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.					Ductile Iron Grate. Open surface area 37.20 square inches. 113.80 GPM.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1215	12" x 12" Square Galvanized Steel Grate	Galvanized Steel	1	5.85	10ND	12" Square Heavy-Duty Galvanized Steel Bar Grate.
	Use with 12" x 12" Catch Basin Series. (see page 79)					Open surface area 113.78 square inches. 348.07 GPM.



Part No.	Description		Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1220	12" x 12" Sump/Valve Box Cover	Black	8	2.23	10ND	NDS #1220, 12" Square		
	Use with NDS 12" x 12" Catch Basin Series, #1225 Sump Bo	x and #1219 B	ackwater Va	llve Box.		Structural Foam Polyolefin Solid Cover.		




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1230	12" x 12" Low-Profile Adapter	Black	8	1.25	10ND	12" x 12" Low-Profile
1230ATBLKIT 1230GRKIT	12" x 12" Low-Profile Adapter with Black Atrium Grate and 3" & 4" Universal Locking Outlet 12" x 12" Low-Profile Adapter with Flat Green Grate	Black Grate Green	8	n/a n/a	10ND	Adapter. Styrene. Kits contain Low-Profile Adapter, 3" & 4" Universal
	and 3" & 4" Universal Locking Outlet	Grate				Locking Outlet and Grate as described.
Adapter alone requires #1242, #1243, #1245, #1266 or #1889 Universal Outlets to connect to 3", 4", 6" or 8" Sewer and Drain or Corrupated Pines (see page 35) Kits contain #1243 Outlet						




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1221	12" x 12" Square, Low-Profile Adapter – Fits 8" Sewer & Drain Pipe	Black	12	1.92	10ND	12" x 12" Low-Profile Adapter. Styrene.
1222	12" x 12" Square, Low-Profile Spigot Adapter – Fits 8" single-wall corrugated pipe, sewer and drain pipe and Schedule 40 pipe	Black	12	1.92	10ND	
	Use with NDS 12" x 12" Grates					




18" Catch Basin Series




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1882	18" One-Piece Catch Basin 2 Openings	Black	1	10.00	10ND	18"x18" One-Piece Tapered Catch Basin.
1882BLKIT	18" Catch Basin Kit with Black Plastic Grate	Black Grate		21.00	10ND	Structural Foam Polyolefin. Kits include 2-opening Catch Basin, Grate, Screws, 6" Outlet, 8" Outlet, Reducer Rings
1882GRKIT	18" Catch Basin Kit with Green Plastic Grate	Green Grate	1	21.00	10ND	
1884	18" One-Piece Catch Basin 4 Openings	Black	1	9.65	10ND	
	Requires either #1206, #1242, #1243, #1245, #1266, #18 Includes 2 or 4 #1890 Reducer Rings.	to basin.	and Plug			




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1800	18" x 18" Expandable Catch Basin 2 Openings*	Black	1	16.00	10ND	18" x 18" Modular Cat			
1804	18" x 18" Expandable Catch Basin 4 Openings*	Black	1	16.00	10ND	Basin with Locking Tal			
	Assembly Required. #1800 includes: 2 #1822, 2 #1820, 1 Use #1800 and #1804 with #1206, #1243, #1245, #1266	Styrene.							




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1816	8" Riser for 18" Catch Basin	Black	1	6.00	10ND	8" Riser for 18" x 18"		
	Riser package includes 4 sides. Use with #1800, #1804, #1882 or #1884.					Catch Basin. Styrene.		



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1881 1891	18" x 18" Atrium Grate 18" x 18" Atrium Grate	Black Green	2 2	6.51 6.51	10ND 10ND	18" Structural Foam Polyolefin Dome Atrium			
	Use with 18" x 18" Catch Basin Series.					Grate with UV inhibitor. Open surface area 89.40 square inches. 273.49 GPM.			



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1810	18" x 18" Square Grate	Gray	4	7.72	10ND	18" Square Structural		
1811	18" x 18" Square Grate	Black	4	7.72	10ND	Foam Polyolefin Grate		
1812	18" x 18" Square Grate	Green	4	7.72	10ND	with UV inhibitor. Open		
	Use with 18" x 18" Catch Basin Series. (see page 79). ADA Compliant.					surface area 86.31 square inches. 264.03 GPM.		




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
1813	18" x 18" Cast Iron Square Grate	Black*	1	46.00	10ND	18" Square Heavy-Duty Cast Iron Grate. Open	
	Use with 18" x 18" Catch Basin Series. *Painted for shipping & display only; grate will form iron-oxide patina						




Part N	lo.	Description	Color	9		Product Class	Specifications
1890		Universal Outlet Reducer Ring	Black	8	0.33	10ND	Styrene.
		Required on #1821 basin side when using 3", 4" or 6" p #1206, #1243, #1245, #1266 or #1889 Universal Outlets					


18" Catch Basin Series (continued)



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1815	18" Square Galvanized Steel Grate	Galvanized Steel	1	10.78	10ND	18" Square Heavy-Duty Galvanized Steel Bar Grate.
	Use with 18" x 18" Catch Basin Series.					Open surface area 239.00 square inches. 731.13 GPM.
	(see page 79)					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1840	Frame to adapt 18" x 18" grate to concrete catch basin	Black	4	2.00	10ND	18" x 18" Frame. Styrene.
	Use with 18" x 18" Grates.					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1830	18" x 18" Low-Profile Adapter	Black	4	4.75	10ND	18" x 18" Low-Profile Adapter. Styrene.			
	Includes NDS #1890 Reducer Ring. Requires either an NDS #1243, #1245, #1266 or #1888 Universal Outlet to connect to pipe.								




24" Catch Basin Series



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
2400	24" x 24" Catch Basin, 2 Openings	Black	1	18.00	10ND	24" x 24" One-Piece Tapered Catch Basin.
2400BLKIT	24" Catch Basin Kit with Black Plastic Grate	Black Grate		50.00	10ND	HDPE with Structural Foam.
2400GRKIT	24" Catch Basin Kit with Green Plastic Grate	Green Grate	1	50.00	10ND	Kits include 2-opening Catch Basin, Grate, 12"/10"
2404	24" x 24" Catch Basin, 4 Openings	Black	1	15.00	10ND	Outlets, 8" Outlet, Reducer Rings and Plug
	#2400 & #2404 Require 2 or 4 #2410 Universal Outlets.					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
2418	24" x 24" Catch Basin Extension (No Bottom)	Black	1	14.60	10ND	8" Extension for 24" x 24" Catch Basin. HDPE with
	Use with 24" x 24" Catch Basin Series.					Structural Foam.




%" Grate Openings

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
2411	24" x 24" Square Grate	Black	1	19.75	10ND	24" Square HDPE with Structural Foam Grate with UV inhibitor. Open surface
2412	24" x 24" Square Grate	Green	1	19.75	10ND	
	Use with 24" x 24" Catch Basin Series. (see page 79)	area 231.69 square inches. 708.77 GPM.				



1" Grate Openings

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
2413	24" x 24" Square Cast Iron Grate	Black*	1	147.00	10ND	24" Square Heavy-Duty Cast Iron Grate. Open surface area 197.00 square inches. 602.65 GPM. Structural Foam.		
	Use with 24" x 24" Catch Basin Series. *Painted for shipping & display only; grate will form iron-oxide pa (see page 79)	tina						




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
2415	24" x 24" Square Galvanized Steel Grate	Galvanized Steel	1	62.88	10ND	24" Square Heavy-Duty Galvanized Steel Bar Grate.	
	Use with 24" x 24" Catch Basin Series. (see page 79)					Open surface area 422.45 square inches. 1292.33 GPM. Structural Foam.	




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
2410	10" & 12" Universal Adapter	10"/12" Universal Adapter. HDPE.					
	Pipe; 12" Single Wall Corrugated Pipe (does not fit 10" S 3" to 8" adapters above (all except #1889) for use with	ncludes #1890 (comes pre-inserted). Fits 10" and 12" Sewer and Drain Pipe; 10" and 12" Dual Wall Corrugated ipe; 12" Single Wall Corrugated Pipe (does not fit 10" Single Wall Corrugated Pipe). Reduces opening to fit most " to 8" adapters above (all except #1889) for use with 3", 4", 6" and 8" Sewer and Drain Pipe; 3", 4", 6" and " Corrugated Pipe; and 4" Sch. 40 Pipe (select corresponding adapter above). Use with 24" Catch Basin Series.					

Catch Basin Universal Outlets


Universal Outlets and Adapters allow you to quickly connect to 3"-12" drain pipes to accommodate the needs of any job. They offer greater flexibility during install saving time and money.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1242	3" & 4" Universal Outlet w/4" Internal Spigot	Black	20	0.74	10ND	3" & 4" Universal Outlet.			
	Fits 3" & 4" Corrugated Pipe, 3" & 4" Sewer and Drain Pipe, 4" Sch. 40 Pipe, 4" Triple Wall Pipe. Allows for adjusting internal basin invert heights with Sewer and Drain fitting. Use with 9", 12", 18" and 24" Catch Basin Series. Internal spigot fits 4" Sewer and Drain Fittings. Use with 24" Catch Basin also requires #2410 Adapter.					Styrene.			




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1243	3" & 4" Universal Locking Outlet*	3" & 4" Patented Universal				
	Fits 3" & 4" Corrugated Pipe, 3" & 4" Sewer and Drain Use with 9", 12", 18" and 24" Catch Basin Series and Suse with 24" Catch Basin also requires #2410 Adapter. *Locking Outlet snaps on to most 3" and 4" corrugated	#930, #1230, #1830	00.	Locking Outlet. Styrene.		



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1245	3" & 4" Offset Universal Outlet	Black	20	0.50	10ND	3" & 4" Offset Universal Outlet. Styrene.			
	Fits 3" & 4" Corrugated Pipe, 3" & 4" Sewer and Drain Pipe, 4" Sch. 40 Pipe, 4" Triple Wall Pipe. Allows for adjusting inlet height. Use with 9", 12", 18" and 24" Catch Basin Series. Use with 24" Catch Basin also requires #2410 Adapter.								



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
1266	6" Universal Locking Outlet*	Black	20	0.55	10ND	6" Universal Locking Outlet.			
	Fits 6" Sewer and Drain Pipe, 6" Corrugated Pipe. Use #1230 and #1830 Low-Profile Adapters. Use with 24" *Locking Outlet snaps on to most 6" corrugated pipe.	Styrene.							




	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
Ī	1888	8" Universal Outlet	Black	8	1.05	10ND	8" Universal Outlet.
		Fits 8" Sewer and Drain Pipe, 8" Corrugated Pipe. Use Use with 24" Catch Basin also requires #2410 Adapter.	Styrene.				



Part No.	Description		Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
1889	8" Offset Universal Adapter	Black	10	0.74	10ND	8" Offset Universal Adapter.		
Fits 8" Sewer and Drain Pipe, 8" Corrugated Pipe. Use with 12" and most 18" Catch Basin Series (except 1800 and 1804).						Styrene.		




	Part No.	Description	Color	Qty.	(lbs.)	Class	Specifications
	2410	10" & 12" Universal Adapter	10ND	10"/12" Universal Adapter.			
"		Includes #1890 (comes pre-inserted). Fits 10" and 12" Pipe; 12" Single Wall Corrugated Pipe (does not fit 10" 3" to 8" adapters above (all except #1889) for use with Corrugated Pipe; and 4" Sch. 40 Pipe (select correspon	Single Wall Corrugate 3", 4", 6" and 8" Se	d Pipe). Redu wer and Drair	ces opening t Pipe; 3", 4",	o fit most 6" and 8"	nure.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1206	6" Universal Adapter Plug	Black	20	0.35	10ND	Universal Plug. Styrene.




POP-UP DRAINAGE EMITTERS




The Pop-up Drainage Emitter is an easy, safe and efficient solution that allows water to be diverted and released to water-safe areas away from structures, erosion-prone landscapes and poor drainage areas.

Pop-up Drainage Emitters allow water captured by grates, catch basins, channel drains, Flo-Well, EZflow, downspouts and roof gutter systems to flow through drainage pipe and away from structural foundations to safe or useful areas. For example, water can be routed from a low area next to a foundation to a water-safe area in the landscape, or a curbside drainage system where allowed. The emitter opens under minimal hydrostatic pressure from water through upstream drainage pipes; the emitter closes as flow diminishes. The special patented design allows the Emitter to open with even the smallest flows. Since the Emitter is closed during dry weather, debris and rodents cannot enter the drain pipes. Spring automatically retracts – closes and prevents damage from lawn mowers. It's flat profile blends discreetly into the surrounding landscapes.


3" & 4" Pop-up Drainage Emitter



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
420	3" & 4" Pop-up Drainage Emitter	Green	20	0.28	10ND	3" and 4" polyolefin spring-loaded
	Fits 3" and 4" Sewer and Drain Fittings. Ideal for discharging excess water from stormwa Spring automatically retracts.		Pop-up Drainage Emitter with UV inhibitor. 40 GPM capacity. 0.04 psi or 1" of head to raise top.			




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
321	Emitter with 3" Elbow	Green	25	0.60 10ND		NDS #420 polyolefin spring-loaded	
	Fits 3" Sewer and Drain Pipe. Ideal for discharging excess water from stormwa Spring automatically retracts.	Pop-up Drainage Emitter with UV inhibitor, 3" styrene 90 degree elbow with 1/4" drain hole. 40 GPM. 0.04 psi or 1" of head to raise top.					



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
421	Emitter with 4" Elbow	Green	20	0.85	10ND	NDS #420 polyolefin spring-loaded		
	Fits 4" Sewer and Drain Pipe.	Pop-up Drainage Emitter with UV inhibitor, 4" styrene 90 degree						
	Ideal for discharging excess water from stormwar Spring automatically retracts.	elbow with 1/4" drain hole. 40 GPM. 0.04 psi or 1" of head to raise top.						


POP-UP DRAINAGE EMITTERS

3" & 4" Pop-up Drainage Emitter (continued)




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
430	Pop-up Drainage Emitter with 3" Elbow and Universal Adapter	Green	20	1.00	10ND	NDS #420 polyolefin spring-loaded Pop-up Drainage Emitter with UV
Universal Adapter fits 3" and 4" corrugated pipe, 3" and 4" sewer and drain pipe, 4" Sch. 40 pipe, and 3" and 4" triple wall pipe. Ideal for discharging excess water from stormwater management system. Spring automate					lly retracts.	inhibitor, 3" styrene 90 degree elbow with 1/4" drain hole and universal pipe adapter. 40 GPM. 0.04 psi or 1" of head to raise top.
1241	3" & 4" Universal Adapter w/4" Spigot	Black	20	0.70	10ND	3" & 4" Patented Universal Adapter.
	Connects 3" & 4" Sewer and Drain Fittings with 3" & 4" Sewer and Drain Pipe, 4" Sch. 40 Pipe a	Styrene.				


6" Pop-up Drainage Emitter



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
620	6" Pop-up Drainage Emitter	Green	15	0.61	10ND	6" polyolefin spring-loaded Pop-up		
	Can be used with Flo-Well to relieve overflow.	Drainage Emitter with UV inhibitor. 88 GPM capacity. 0.04 psi or 1" of head to raise top.						



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
624	6" Pop-up Emitter with Elbow and Corrugated Pipe Adapter	Green	10	3.45	10ND	NDS #620 polyolefin spring-loaded Pop-up Drainage Emitter with UV inhibitor, 6" styrene 90 degree elbow with 1/4" drain hole and corrugated pipe adapter. 88 GPM. 0.04 psi or 1" of head to raise top.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
625	6" Pop-up Emitter wih Spee-D® Basin	Green	8	2.21	10ND	NDS #620 polyolefin spring-loaded Pop-up Drainage Emitter with UV inhibitor and Spee-D basin. 88 GPM. 0.04 psi or 1" of head to raise top.



COMMOM DRAINAGE FITTINGS

90 Degree PVC Elbow



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
3P02	3" PVC 90 Degree Elbow (HUB x HUB)	White	40	0.40	30PV
4P02	4" PVC 90 Degree Elbow (HUB x HUB)	White	25	0.68	30PV
6P02	6" PVC 90 Degree Elbow (HUB x HUB)	White	12	3.00	30PV

Corrugated Adapter



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
351	3" Polyethylene Corrugated Adapter (CORR HUB x S&D SPT or HUB)	Black	50	0.10	30ST
451	4" Polyethylene Corrugated Adapter (CORR HUB x S&D SPT or HUB)	Black	25	0.20	30ST
651	6" Polyethylene Corrugated Adapter (CORR HUB x S&D SPT or HUB)	Black	12	0.25	30ST

Corrugated Internal Couplings



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
3C05	3" Corrugated Coupling	Black	60	0.07	30PE
4C07	4" Corrugated Coupling	Black	36	0.08	30PE
6C07	6" Corrugated Coupling	Black	12	0.08	30PE

Corrugated End Caps



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class
3006	3" Corrugated Endcap	Black	33	0.05	30PE
4C06	4" Corrugated Endcap	Black	30	0.06	30PE
6006	6" Corrugated Endcap	Black	15	0.50	30PE

Note: See Fittings section (pages 170-189) for additional fitting options.



NDS offers a variety of grates in sizes, patterns, colors and design options to fit all products and enhance any landscape.

Brass & Chrome Grates





Strong - Practical - Functional

Our solid cast brass grates are secured to a PVC collar with solid brass screws for aesthetics and reliability. The PVC collar can be solvent welded into sewer and drain fittings or pipe where permanent, anti-theft installation is desired. The grate can still be removed for easy cleanout.


- A unique mix of beauty and function
- · Recommended for highly-visible entry areas in hotels, malls, office buildings, country clubs and estates
- Exceptional construction and fine finish also make these grates ideal for deck areas, walkways, swimming pools and spas

Materials & Standards

- Made with the highest-quality solid brass
- Brushed Satin and Polished Chrome finishes are protected by a clear plastic film that prevents damage to the finish during shipping and installation



Brass & Chrome Grates




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
552B	1 ft. Brass Channel Grate	Satin Brass	12	1.21	25PF	1 foot Mini Channel Solid
553PB	1 ft. Brass Channel Grate	Polished Brass	12	1.21	25PF	Brass Grate with brass screws. Open surface area
†	Fits #500 and #550 Mini Channels. (see pages 50).		9.20 square inches per foot. 28.14 GPM per foot.			
Λ	(see page 79). ADA Compliant/Heel-proof.					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications			
909B	3" Round Brass Grate w/PVC Collar	Satin Brass	20	0.40	15BR	3" Round Solid Brass Grate and brass screws			
905PB	3" Round Brass Grate w/PVC Collar	Polished Brass	20	0.40	15BR	with PVC collar. Open			
*	Fits 2" SCH-40 Pipe and 3" Sewer and Drain Fitting	surface area 2.68 square inches. 8.20 GPM.							
Λ	(see page 79). ADA Compliant/Heel-proof.								



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications			
915SC	3" Round Chrome Grate w/PVC Collar	Satin Chrome	20	0.40	15BR	3" Round Solid Chrome Grate and screws with PVC collar. Open surface			
907PC	3" Round Chrome Grate w/PVC Collar	Polished Chrome	20	0.40	15BR				
广	Fits 3" Sewer and Drain Fittings and 2" SCH-40 Pip (see page 79). ADA Compliant/Heel-proof.	e.				area 2.68 square inches. 8.20 GPM.			



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
910B 906PB	4" Round Brass Grate w/PVC Collar 4" Round Brass Grate w/PVC Collar	Satin Brass Polished Brass	20	0.64	15BR 15BR	4" Round Solid Brass Grate and brass screws with PVC collar. Open
广	Fits 3" Sewer & Drain Pipe, 4" Sewer & Drain Fitting (see page 79). ADA Compliant/Heel-proof.	gs.				surface area 5.25 square inches. 16.06 GPM.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
917SC	4" Round Chrome Grate w/PVC Collar	Satin Chrome	20	0.66	15BR	4" Round Chrome Grate and screws with PVC collar. Open surface area
908PC	4" Round Chrome Grate w/PVC Collar	Polished Chrome	20	0.66	15BR	
於	Fits 3" Sewer & Drain Pipe, 4" Sewer & Drain Fitting (see page 79). ADA Compliant/Heel-proof.	5.25 square inches. 16.06 GPM.				



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
918B	6" Round Brass Grate w/Styrene Collar	Satin Brass	8	1.38	15BR	6" Round Solid Brass Grate and brass screws with styrene collar. Open
919PB	6" Round Brass Grate w/Styrene Collar	Polished Brass	8	1.38	15BR	
*	Fits Spee-D® Basin, 6" Sewer & Drain Fittings.					surface area 13.10 square inches. 40.07 GPM.
Λ	(see page 79). ADA Compliant.					


Brass & Chrome Grates (continued)




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
913B 914PB	5" Square Brass Grate w/PVC Collar 5" Square Brass Grate w/PVC Collar	Satin Brass Polished Brass	10 10	1.21	15BR 15BR	5" Square Solid Brass Grate with brass screws and PVC collar. Open
广	Fits 4" Sewer and Drain Fittings, 3" Sewer and Drain (see page 79). ADA Compliant.	surface area 2.5 square inches. 7.65 GPM.				




Pai	rt No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications	
920	OB 3PB	6" Square Brass Grate w/Styrene Adapter 6" Square Brass Grate w/Styrene Adapter	Satin Brass Polished Brass	8	1.65 1.65	15BR 15BR	6" Square Solid Brass Grate with brass-colored styrene low-profile adapter and brass screws. Open	
	†	Fits 3" or 4" Sewer and Drain Pipe or Fittings, 3" or (see page 79). ADA Compliant.	ain Pipe or Fittings, 3" or 4" Corrugated Pipe, and 3" or 4" Triple Wall Pipe. t.					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
921B	6" Square Brass Grate w/Styrene Adapter	Satin Brass	8	1.71	15BR	6" Square Solid Brass Grate with brass-colored styrene low-profile adapter
922PB	6" Square Brass Grate w/Styrene Adapter	Polished Brass	8	1.70	15BR	
×	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti (see page 79). ADA Compliant.	ngs.	and brass screws. Open surface area 11.60 square inches. 35.49 GPM.			




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications			
78B	4" Atrium Brass Grate	Brass	1	2.00	15BR	Open surface area 10.20 square inches. 31.20 GPM.			
	Fits 4" Sewer and Drain Pipe & Fittings.								



I	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications		
!	90B	6" Atrium Brass Grate	Brass	1	5.30	15BR	Open surface area 22.50 square inches. 68.83 GPM.		
		Fits 6" Sewer and Drain Pipe & Fittings.	square mones. oo.oo uriii.						



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications			
930B	9" Square Brass Grate	Brass	1	5.11	15BR	Open surface area 34.00 square inches. 104.01 GPM.			
	(see page 79). ADA Compliant.					Includes SS Screws.			



Pa	rt No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications		
12	30B	12" Square Brass Grate	Brass	1	9.24	15BR	Open surface area 42.87 square inches. 131.14 GPM.		
		(see page 79). ADA Compliant.					Includes SS Screws.		



Decorative Grates


Designed to meet today's demand for products that are as beautiful as they are functional. NDS decorative grates feature consumer-tested designs and offer a range of colors and materials ideal for any application or setting.






Catch Basin Plastic & Metal Decorative Grates

Fits 12" Catch Basins. Available in Botanical and Wave designs, in multiple colors or in cast iron. Plastic grates are "T-top" and overlap basin edge. Iron grates sit flush.




1218
839

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1218S	12" x 12" Square Botanical Grate	Sand	8	3.27	10ND	12" Square Structural
1218GR	12" x 12" Square Botanical Grate	Green	8	3.27	10ND	Foam Polyolefin Botanical Grate with UV inhibitor.
1218GY	12" x 12" Square Botanical Grate	Gray	8	3.27	10ND	Open surface area 24.44
1218	12" x 12" Square Botanical Grate	Black	8	3.27	10ND	square inches. 74.77 GPM.
839	#6 x 1-3/4 FH Phillips Screw	Metal	40	n/a	10ND	Class B load rated.
	Use Screw # 839, FH#6 x 1-3/4". (see page 79). ADA Compliant.					





Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1218CI	12" x 12" Square Botanical Cast Iron Grate	Black*	1	12.67	10ND	12" Square Cast Iron
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a	10ND	Botanical Grate. Open surface area 24.44 square
	Use Screw # 629, FH#20 x 1-1/2". *Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.					inches. 74.77 GPM. Class B load rated.



%" Grate Openings

11 %	/ ₁₆ "
T	diditionally by the state of th
1 1/8"	de la
	%" Grate Openings

Part No.	[
1224S	1
1224GR	1
1224GY	1
1224	1
839	#

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
1224S	12" x 12" Square Wave Grate	Sand	8	2.68	10ND	12" Square Structural
1224GR	12" x 12" Square Wave Grate	Green	8	2.68	10ND	Foam Polyolefin Wave Grate with UV inhibitor. Open surface area 25.67
1224GY	12" x 12" Square Wave Grate	Gray	8	2.68	10ND	
1224	12" x 12" Square Wave Grate	Black	8	2.68	10ND	square inches. 78.53 GPM.
339	#6 x 1-3/4 FH Phillips Screw	Metal	40	n/a	10ND	Class B load rated.
	Use Screw # 839, FH#6 x 1-3/4". (see page 79). ADA Compliant.					

3	2	_		
S)				
s				

Part No.	Description	Color	Pkg. Qty.	Wt. (lbs
1224CI	12" x 12" Square Wave Cast Iron Grate	Black*	1	13.9
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a
_	Use Screw # 629, FH#20 x 1-1/2".			

Use Screw # 629, FH#20 x 1-1/2".
*Painted for shipping & display only; grate will form iron-oxide patina $$
(see page 79). ADA Compliant.


Opcomoduona
12" Square Cast Iron Wave Grate. Open surface area 25.60 square inches. 78.31 GPM. Class B load rated.

Product

10ND

Slim Channel Plastic Decorative Grates


Excellent for light duty applications, including residential pools, concrete and paver patios, spas, walkways and paver landscapes.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
9251	3 ft. Slim Channel Grate Square	White	30 EA (90 LF)	0.36	25PF	3 ft Polypropylene Decorative Square
9252	3 ft. Slim Channel Grate Square	Sand	30 EA (90 LF)	0.36	25PF	Channel Grate with UV inhibitor. Open Surface
9253	3 ft. Slim Channel Grate Square	Gray	30 EA (90 LF)	0.36	25PF	Area 5.73 square inches per foot. 21.44 GPM per foot.
9261	3 ft. Slim Channel Grate Chain	White	30 EA (90 LF)	0.36	25PF	3 ft Polypropylene Decorative Chain
9262	3 ft. Slim Channel Grate Chain	Sand	30 EA (90 LF)	0.36	25PF	Channel Grate with UV inhibitor. Open Surface
9263	3 ft. Slim Channel Grate Chain	Gray	30 EA (90 LF)	0.36	25PF	Area 5.73 square inches per foot. 21.44 GPM
广	(see page 79). ADA Compliant/Heel-proof					per foot.

Mini Channel Plastic & Metal Decorative Grates

Fits 500 Series Mini Channel. Available in Botanical and Wave designs, in multiple colors or in cast iron. Plastic grates are "T-top" and overlap basin edge. Iron grates sit flush.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
846	Stainless Steel Screws, FH #4 x 5/8"	Steel	64	0.10	25PF	3 ft. Structural Foam Polyolefin botanical pattern Channel Grate with UV inhibitor. Open surface	
554S	3' Botanical Channel Grate	Sand	16	0.89			
554GR	3' Botanical Channel Grate	Green	16	0.89		area 5.44 square inches per	
554GY	3' Botanical Channel Grate	Gray	16	0.89		foot. 16.64 GPM per foot.	
554	3' Botanical Channel Grate	Black	16	0.89		1 ft. Mini Channel botanical Cast Iron Channel Grate. Open surface area 5.39 square inches per foot. 16.49 GPM per foot.	
554CI	1' Botanical Cast Iron Channel Grate	Black*	1	1.82			
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a	10ND		
	*Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.						




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications		
846	Stainless Steel Screws, FH #4 x 5/8"	Steel	64	0.10	25PF	3 ft. Structural Foam Polyolefin		
555S	3' Wave Channel Grate	Sand	16	0.88	25PF	wave pattern Channel Grate with UV inhibitor. Open surface		
555GR	3' Wave Channel Grate	Green	16	0.88		area 5.73 square inches per		
555GY	3' Wave Channel Grate	Gray	16	0.88		foot. 17.54 GPM per foot.		
555	3' Wave Channel Grate	Black	16	0.88		1 ft. Mini Channel Wave Cast		
555CI	1' Wave Cast Iron Channel Grate	Black*	1	1.30		Iron Channel Grate. Open surface area 4.11 square inches per foot. 12.56 GPM per foot.		
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a	10ND			
	*Painted for shipping & display only; grate will form iron-oxid (see page 79). ADA Compliant.	*Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.						




Spee-D® Channel Plastic & Metal Decorative Grates

Fits Spee-D® Channel. Available in Botanical and Wave designs, in multiple colors or in cast iron. Plastic grates are "T-top" and overlap basin edge. Iron grates sit flush.



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
829	Stainless Steel Screws, FH #8 x 1"	Steel	48	0.06	25PF	2 ft. Structural Foam Polyolefin			
252S	2' Channel Botanical Grate	Sand	24 ft.	1.74	25PF	decorative botanincal Channel Grate with UV inhibitor, Open			
252GR	2' Channel Botanical Grate	Green	24 ft.	1.74	25PF	surface area 7.78 square inches			
252GY	2' Channel Botanical Grate	Gray	24 ft.	1.74	25PF	per foot. 23.80 GPM per foot.			
252	2' Channel Botanical Grate	Black	24 ft.	1.74	25PF	2 ft. Cast Iron decorative			
252Cl	2' Cast Iron Channel Botanical Grate	Black*	1 ft.	7.06	25PF	botanincal Channel Grate. Open			
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a	10ND	surface area 8.99 square inches per foot. 27.50 GPM per foot.			
	*Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.								



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
829	Stainless Steel Screws, FH #8 x 1"	Steel	48	0.06	25PF	2 ft. Structural Foam Polyolefin	
253S	2' Channel Wave Grate	Sand	24 ft.	1.84	25PF	decorative wave Channel Grate with UV inhibitor. Open surface	
253GR	2' Channel Wave Grate	Green	24 ft.	1.84	25PF	area 7.78 square inches per	
253GY	2' Channel Wave Grate	Gray	24 ft.	1.84	25PF	foot. 23.80 GPM per foot.	
253	2' Channel Wave Grate	Black	24 ft.	1.84	25PF	2 ft. Cast Iron decorative wave Channel Grate. Open surface area 7.41 square inches per foot. 22.67 GPM per foot. Class	
253CI	2' Cast Iron Channel Wave Grate	Black*	2 ft.	7.52	25PF		
629	#20 x 1-1/2 FH Phillips Screw	Metal	40	n/a	10ND		
	*Painted for shipping & display only; grate will form iron-oxide patina (see page 79). ADA Compliant.						

Dura Slope Metal Decorative Grates

Fits all Dura Slope channels. Available in 8 designs: Weave, Tile, Brick, Diamond, Slot, Kiaro, Via and Ville. Ductile iron material, rated Class D and ADA compliant.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications			
DS-601	Weave Pattern	Raw Iron	1	14.50	25DS	Decorative grates are made of ductile iron.			
DS-602	Diamond Pattern	Raw Iron	1	14.30	25DS	Weave: open area 6.75 square inches per foot;			
DS-603	Tile Pattern	Raw Iron	1	14.70	25DS	20.65 GPM. Diamond: open area 9.55 square			
DS-604	Brick Pattern	Raw Iron	1	14.30	25DS	inches per foot; 29.21 GPM. Tile: open area 7.95 square inches per foot; 24.32 GPM. Brick: open area 11.35 square inches per foot; 34.725 GPM. Deco slot: open area 16.75 square inches per foot; 51.24 GPM.			
DS-609	Deco Slot	Raw Iron	1	14.50	25DS				
DS-610-KIARO	Kiaro Slot	Ductile Iron	120	14.99	25DS				
DS-611-VIA	Via Slot	Ductile Iron	120	10.36	25DS				
DS-612-VILLE	Ville Pattern	Ductile Iron	120	11.68	25DS				
	Use with Dura Slope Drains (page 72), Dura Slope C	atch Basins (page 7	4).						
	Decorative grates are made of ductile iron. Uncoate Additional powder-coat colors available: Black (K), V Orange (O), Gray (Y), Brown (N)								
	MTO 6-7 week lead time.								
	(see page 79). ADA Compliant/Heelproof. Must be used with DS-200H to acheive Class D Load Rating.								


Round Grates




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
14	3" Round Grate	Black	40	0.13	10ND	3" Round Structural Foam
15	3" Round Grate	Gray	40	0.13	10ND	Polyolefin Grate with UV inhibitor. Open surface area 2.60 square inches. 7.95 GPM.
16	3" Round Grate	Green	40	0.13	10ND	
16P	3" Round Grate	Purple	40	0.13	10ND	
16S	3" Round Grate	Sand	40	0.13	10ND	
†	Fits 3" Sewer and Drain Pipe & Fittings, 3" Co (see page 79). ADA Compliant/Heel-proof.					



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications			
11	4" Round Grate	Black	25	0.17	10ND	4" Round Structural Foam Polyolefin Grate with UV inhibitor. Open suraface area 3.85 square inches. 11.78 GPM.			
12	4" Round Grate	Gray	25	0.17	10ND				
13	4" Round Grate	Green	25	0.17	10ND				
13P	4" Round Grate	Purple	25	0.17	10ND				
13S	4" Round Grate	Sand	25	0.17	10ND				
大	Fits 4" Sewer and Drain Pipe & Fittings, 4" Corrugat (see page 79). ADA Compliant/Heel-proof.								



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
40	6" Round Grate	Black	10	0.49	10ND	6" Round Structural Foam
50	6" Round Grate	Green	10	0.49	10ND	Polyolefin Grate with UV inhibitor. Open surface area 9.10 square inches. 27.84 GPM.
60	6" Round Grate	Gray	10	0.49	10ND	
60S	6" Round Grate	Sand	10	0.49	10ND	
广	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti (see page 79). ADA Compliant/Heel-proof.					



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
10	8" Round Grate	Black	10	0.60	10ND	8" Round Structural Foam Polyolefin Grate with UV inhibitor. Open surface area 11.50 square inches. 35.18 GPM.
20	8" Round Grate	Green	10	0.60	10ND	
30	8" Round Grate	Gray	10	0.60	10ND	
30S	8" Round Grate	Sand	10	0.60	10ND	
j.						
Λ						



Round Grates (continued)




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
1040	10" Round Grate	Black	10	1.01	10ND	10" Round Structural Foam Polyolefin Grate with UV inhibitor. Open surface area 21.57 square inches. 65.99 GPM.
1050	10" Round Grate	Green	10	1.01	10ND	
1060	10" Round Grate	Gray	10	1.01	10ND	
1060S	10" Round Grate	Sand	10	1.01	10ND	
rich (Fits 8" Sewer and Drain Pipe & Fittings, 8" Corruga					
广	(see page 79). ADA Compliant.					



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications		
1240	12" Round Grate	Black	6	2.44	10ND	12" Round Structural Foam Polyolefin Grate with UV inhibitor. Open surface area 46.00 square inches. 140.72 GPM.		
1250	12" Round Grate	Green	6	2.44	10ND			
1260	12" Round Grate	Gray	6	2.44	10ND			
	Fits 12" Sewer and Drain Pipe, 12" Corrugated Pipe.							
	(see page 79)							




Pa	art No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
15	511	15" Round Grate	Black	6	6.89	10ND	15" Round Structural
1	512	15" Round Grate	Green	6	6.89	10ND	Foam Polyolefin Grate with UV inhibitor. Open surface
		area 85.60 square inches. 261.86 GPM.					
		(see page 79)					201.00 di M.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications			
1801SDG	18" Round Grate	Green	1	7.50	28ND	Round Polypropylene			
	Fits 18" Sewer and Drain Fittings, 18" Corrugated P (see page 79)	ipe, includes Lag Bolts.				Grate. Open surface area 75.55 square inches. 231.12 GPM. Includes lag bolts.			


Atrium Grates




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications	
270	2" Atrium Grate	Gray	20	0.10	10ND	Flat-Top PVC Atrium Grate	
	Fits 2" Schedule 40 Fittings.					with UV inhibitor. Open surface area 4.00 square inches. 12.24 GPM.	



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
70	3" Atrium Grate	Green	20	0.16	10ND	Flat-Top Structural Foam
72	3" Atrium Grate	Gray	20	0.16	10ND	Polyolefin Atrium Grate with UV inhibitor. Open
74	3" Atrium Grate	Black	20	0.16	10ND	surface area 9.40 square inches, 28.76 GPM.
74S	3" Atrium Grate	Sand	20	0.16	10ND	11011001 2017 0 GF 1111
	Fits 3" Sewer and Drain Pipe & Fittings, 3" Corruga					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
75	4" Atrium Grate	Green	20	0.21	10ND	Flat-Top Structural Foam
76	4" Atrium Grate	Gray	20	0.21	10ND	Polyolefin Atrium Grate with UV inhibitor. Open
78	4" Atrium Grate	Black	20	0.21	10ND	surface area 17.00 square inches, 52.01 GPM.
78S	4" Atrium Grate	Sand	20	0.21	10ND	monosi ozlor di mi
	Fits 4" Sewer and Drain Pipe & Fittings, 4" Corruga					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
80	6" Atrium Grate	Green	10	0.62	10ND	Flat-Top Structural Foam
81	6" Atrium Grate	Gray	10	0.62	10ND	Polyolefin Atrium Grate with UV inhibitor. Open
90	6" Atrium Grate	Black	10	0.62	10ND	surface area 28.40 square inches, 86.88 GPM.
90S	6" Atrium Grate	Sand	10	0.62	10ND	
	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti					




Square Grates



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications			
1	4" Square Grate	Green	40	0.11	10ND	4" Square Structural Foam			
2	4" Square Grate	Black	40	0.11	10ND	Polyolefin Grate with diagonally converging			
3	4" Square Grate	Gray	40	0.11	10ND	pattern with UV inhibitor. Open surface area 3.45			
*	Fits 3" Sewer and Drain Pipe & Fittings, 3" Corrugated Pipe, and 3" Triple Wall Pipe.								
*	(see page 79). ADA Compliant/Heel-proof.								



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications		
7	5" Square Grate	Green	25	0.20	10ND	5" Square Structural Foam Polyolefin Grate with diagonally converging		
8	5" Square Grate	Black	25	0.20	10ND			
9	5" Square Grate	Gray	25	0.20	10ND	pattern with UV inhibitor. Open surface area 4.25		
*	Fits 4" Sewer and Drain Pipe & Fittings, 4" Corrugated Pipe, and 4" Triple Wall Pipe.							
\wedge	(see page 79). ADA Compliant/Heel-proof.							




1/4"	Grate	Ope	ning

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
4	6" Square Grate	Black	10	0.40	10ND	6" Square Structural Foam
5	6" Square Grate	Green	10	0.40	10ND	Polyolefin Grate with diagonally converging
6	6" Square Grate	Gray	10	0.40	10ND	pattern with UV inhibitor. Open surface area 10.40
06S	6" Square Grate	Sand	10	0.40	10ND	square inches. 31.81 GPM.
*	Fits 3" or 4" Sewer and Drain Pipe, 3" o	r 4" Corrugated Pipe, and 3'	or 4" Triple Wall	Pipe.		
Λ	(see page 79). ADA Compliant/Heel-proof.					




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
640	6" x 6" x 4" Square Grate & Adapter	Black	8	0.83	10ND	6"x6" Low-Profile Adapter
641	6" x 6" x 4" Square Grate & Adapter	Green	8	0.83	10ND	and Structural Foam Polyolefin Removable
642	6" x 6" x 4" Square Grate & Adapter	Gray	8	0.83	10ND	Grate with UV inhibitor and stainless steel screws.
†	Fits 3" or 4" Sewer and Drain Pipe & Fittings, 3" or (see page 79). ADA Compliant/Heel-proof.	4" Corrugated Pipe, an	d 3" or 4" Tri _l	ole Wall Pipe.		Open surface area 14.44 square inches. 44.17 GPM.




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
637	6" x 6" x 6" Square Grate & Adapter	Black	8	0.88	10ND	6"x6" Low-Profile Adapter and Structural Foam
Ķ	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti (see page 79). ADA Compliant/Heel-proof.	ngs.				Polyolefin Removable Grate with UV inhibitor and stainless steel screws. Open surface area 14.44 square inches. 44.17 GPM.

Square Grates (continued)




Part No.	Description	Color	Pkg. Qty.	Wt. Ea. Ibs.	Product Class	Specifications
771	7" Square Grate	Black	10	0.65	10ND	7" Square Structural Foam
772	7" Square Grate	Green	10	0.65	10ND	Polyolefin Grate with UV inhibitor. Open surface
773	7" Square Grate	Gray	10	0.65	10ND	area 13.60 square inches. 41.60 GPM.
773S	7" Square Grate	Sand	10	0.65	10ND	71.00 di III.
Ķ	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti					
\wedge	(see page 79). ADA Compliant/Heel-proof.					



1/4" Grate Opening

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
881	8" Square Grate	Black	10	0.79	10ND 10ND 10ND 10ND	8" Square Structural Foam Polyolefin Grate with UV inhibitor. Open surface area 17.16 square inches. 52.49 GPM.
882	8" Square Grate	Green	10	0.79		
883	8" Square Grate	Gray	10	0.79		
883S	8" Square Grate	Sand	10	0.79		
广	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti					
Λ	(see page 79). ADA Compliant/Heel-proof.					




% Grate Opening


Part No.	Description	Color	Pkg. Qty.	Wt. Ea. lbs.	Product Class	Specifications
950	9" Square Grate	Green	10	1.11	10ND	9" Square Structural Foam
960	9" Square Grate	Gray	10	1.11	10ND	Polyolefin Grate with UV inhibitor. Open surface
970	9" Square Grate	Black	10	1.11		area 28.40 square inches. 86.88 GPM.
970S	9" Square Grate	Sand 10		1.11	10ND	
*	Fits Spee-D® Basin, 6" Sewer and Drain Pipe & Fitti					
*	(see page 79). ADA Compliant.					




Duracast™ In-Line Grates




Part No.	Description	Color	 Wt. Ea. (lbs.)	Product Class	Specifications		
D6	6" Round Grate	6" Round Heavy-Duty					
	Fits 6" Corrugated and Sewer and Drain Pipe. D6 is not a custom grate and qualifies for normal NI Fits SPEE-D® Basin. *Painted for shipping & display only; grate will form iron-oxio (see page 79).	Ü			Ductile Grate with Black Paint. Open surface area 7.05 square inches. 21.57 GPM. H-20 load rating.		



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
D8	8" Round Grate	Black*	1	14.59	10ND	8" Round Heavy-Duty
	Fits 8" Corrugated and Sewer and Drain Pipe. D8 is not a custom grate and qualifies for normal NI *Painted for shipping & display only; grate will form iron-oxio (see page 79).	•				Ductile Iron Grate with Black Paint. Open surface area 13.98 square inches. 42.77 GPM. Bolt holes for added security. H-20 load rating.



Part No.	Description			Wt. Ea. (lbs.)	Product Class	Specifications	
D10	10" Round Grate	10" Round Heavy-Duty					
	Fits 10" Corrugated and Sewer and Drain Pipe. D10 is not a custom grate and qualifies for normal I "Painted for shipping & display only; grate will form iron-oxio (see page 79).					Ductile Iron Grate with Black Paint. Open surface area 26.82 square inches. 82.05 GPM. Bolt holes for added security. H-20 load rating.	



Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications	
D12H-W0 D12	12" Square Hinged Cast Iron Grate without Adapter 12" Round Grate	Black*	1	48.00 16.00	10ND 10ND	H-20 load rating. Open surface area 48.30 square inches. 147.76 GPM.	
	Fits 12" Corrugated and Sewer and Drain Pipe. *Painted for shipping & display only; grate will form iron-oxid		H-20 load rating. Open surface area 55.16 square inches. 169.74 GPM.				

DRAINAGE PRODUCTS INDEX

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
1	48	250	26	900GRKIT	27	1212S	30	2404	34
2	48	252	44	900KITDISP	27	1213	31	2410	34, 35
3	48	252Cl	44	905PB	40	1215	31	2411	34
3C05	21, 38	252GR	44	906PB	40	1216	29	2412	34
3C06	21, 38	252GY	44	907PC	40	1217	29	2413	34
3P02	38	252S	44	908PC	40	1218	30, 42	2415	34
4	48	253	44	909B	40	1218Cl	30, 42	2418	34
4C06	21, 38	253Cl	44	910B	40	1218GR	30, 42	D6	50
4C07	21, 38	253GR	44	913	28	1218GY	30, 42	D8	50
4P02	38	253GY	44	913B	41	1218S	30, 42	D10	50
5	48	253S	44	914PB	41	1220	31	D12	50
6	48	270	47	915	28	1221	31	D12H-W0	50
6006	21, 38	300	26	915SC	40	1222	31	DS-601	44
6C07	21, 38	321	36	916	27	1224	31, 42	DS-602	44
6P02	38	350	26	917SC	40	1224Cl	31, 42	DS-603	44
06S	48	351	38	918B	40	1224GR	31, 42	DS-604	44
7	48	420	36	919PB	40	1224GY	31, 42	DS-609	44
8	48	421	36	920B	41	1224S	31, 42	DS-610-KIARO	44
9	48	451	38	921B 922PB	41	1225	29	DS-611-VIA	44
10	45 45	552B 553PB	40 40	923PB	41	1230	31	DS-612-VILLE	44
11 12	45	554	43	930 930	41 28	1230ATBLKIT	31	EZ-0701A	21
13	45	554CI	43	930B	28, 41	1230B 1230GRKIT	30 , 41 31	EZ-0701F	21 21
13P	45	554GR	43	930GRKIT	20, 41	1230GRN1 1240	46	EZ-1001A EZ-1001F	21
13S	45	554GY	43	931	28	1240	35	EZ-1001F EZ-1501A	21
14	45	554S	43	932	28	1242	35	EZ-1501A EZ-1501F	21
15	45	555	43	933	28	1245	35	FWAS24CWH	25
16	45	555CI	43	950	49	1250	46	FWAS24WH	25
16P	45	555GR	43	960	49	1260	46	FWBP24	25
16S	45	555GY	43	970	49	1266	35	FWFF67	25
20	45	555S	43	970S	49	1280	30	FWSD69	25
30	45	620	37	980	27	1290	30	FWSPS3WH	25
30S	45	624	37	981	27	1511	46	SC-1820-C-0	23
40	45	625	37	990	27	1512	46	SC-1820-E-0	23
50	45	629	30, 31, 42, 43, 44	991	27	1800	32	SC-1820-M-0	23
60	45	637	48	999	27	1801SDG	46	SC-1820-S-0	23
60S	45	640	48	999S	27	1804	32	SC-2412P	23
70	47	641	48	1040	46	1810	32	SC-3020P	23
72	47	642	48	1050	46	1811	32	SC-3475-C-0	23
74	47	651	38	1060	46	1812	32	SC-3475-E-0	23
74S	47	771	49	1060S	46	1813	32	SC-3475-M-0	23
75	47	772	49	1200	29	1815	33	SC-3475-S-0	23
76	47	773	49	1200BLKIT	29	1816	32	SC-3475W-C-0	23
78	47	773S	49	1200DSG	30	1830	33	SC-3475W-E-0	23
78B	41	829	44	1200FF	29	1840	33	SC-3475W-M-0	23
78S	47	839	30, 31, 42	1200GRKIT	29	1881	32	SC-3475W-S-0	23
80	47	846	43	1200KITDISP	29	1882	32	SC-44105-C-0	23
81	47	881	49	1200NGB	29	1882BLKIT	32	SC-44105-E-0	23
90	47	882	49	1200NGBKIT	29	1882GRKIT	32	SC-44105-M-0	23
90B	41	883	49	1203	29	1884	32	SC-44105-S-0	23
90S	47	883S	49	1204	29	1888	35	SC-FL-10	23
101	26	900	27	1206	35	1889	35	SC-NWFF-500	23
101ATBLKIT	26	900-4	27	1207	29	1890	32	SC-ST	23
101GRKIT	26	900BLKIT	27	1208	29	1891	32	SC-WFF-75	23
101R	26	900DSG	27	1210	30	2400	34		
101SQGRKIT	26	900DSGKIT	27	1211	30	2400BLKIT	34		
201	26	900FF	27	1212	30	2400GRKIT	34	l	



You Click, You Order. No Waiting.

Getting connected is easy... set up your account online, or call customer service. 800-7261994. Se Habla Español.

ndspro.net

The 24 hour online dealer tool that helps you manage your NDS Business

Pricing Query

Instant Order Entry, No Wait

Check Discount Schedules

Check Order Status

Invoice Printing

Inventory Query

Manage Your Account

News Updates

Links to ndspro.com and Literature Direct



NEW! Shopping Cart
Easy to Use & Convenient



TERMS AND CONDITIONS OF SALE

Terms: Standard terms are NET 30 days. All invoices are to be paid in US Currency. Title and risk of loss pass to buyer upon shipment.

Freight Allowance: Freight prepaid on orders of \$1250.00 NET or more, with the exception of shipments to HI, Canada, AK, and PR Prepaid freight levels are based on shipments to one location only. It is the responsibility of the customer to determine if his purchase order meets the minimum freight allowance required. NDS reserves the right to select the carrier and point of shipment.

Canada, Hawaii, Puerto Rico & Alaska orders that include EZflow must be a minimum of \$4000 for prepaid freight Terms.

Canada, Puerto Rico & Alaska: Freight prepaid on orders of \$2500.00 (US\$) NET or more.

Hawaii Orders: Freight prepaid on orders of \$3500 NET or more.

Errors & Claims: All claims for shortage in shipment or damaged material must be noted on the "Bill of Lading" and a written request for credit submitted to NDS within 15 days of shipment. NDS responsibility ceases upon delivery to the carrier.

Returned Goods: Returned goods will be accepted only after written approval and shipping instructions are received from NDS. A return goods authorization number is required and must be on all cartons, documents, and correspondence. All returns are subject to a 25% restocking charge, freight cost of returned goods (plus "out freight if applicable"). A higher restocking charge may be assessed against any return requiring extraordinary handling costs.

Minimum Order: \$100.00 minimum order net billing.

Broken Box Charge: A 25% broken box charge will be added for other than full box quantities. 21DI Drip Components, 25DS Dura Slope Channel and 25FC Filcoten Channel are excluded from this policy.

Limited One Year Warranty: The liabilities of NDS are limited solely and exclusively to replacement as set forth in our standard "Statement of Warranty", alone and do not include any liability for incidental, consequential or other damage of any kind whatsoever, whether any claim is based upon theories of contract, warranty, negligence or tort and without any limitations and do not include shipping charges, labor, installation or any other losses or expenses incurred in operation of any replacement specialty item or fitting. NDS drainage products are designed to be used for exterior surface drainage only.

Limited Lifetime Warranty: NDS warrants to the original owner of its NDS catch basins, grates, channel and Pro Series valve boxes, subject to the conditions set forth in this warranty, that NDS catch basins, grates, channel and Pro Series valve boxes will remain free from manufacturing defects.

All NDS products are guaranteed against defects resulting from faulty workmanship or materials. Claims for labor costs and other expenses required to replace defective products or repair of any damage resulting from the use thereof will not be allowed by NDS. Our liability is limited to replacement of products acknowledged by NDS to be defective.

Exclusive Warranties and Remedies: The foregoing remedies are exclusive and are given and accepted in lieu of (I) any and all other warranties, expressED or implied, including without limitation the implied warranties of merchantability and fitness for particular purpose; and (ii) any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from NDS, Inc.'s negligence, actual or imputed. The remedies of customer shall be limited to those provided herein to the exclusion of any and all other remedies including, without limitation, incidental or consequential damages. No agreement varying or extending the foregoing warranties or these limitations will be binding on NDS, Inc., unless such is signed in writing by an authorized officer of NDS, Inc.

The liability of NDS, Inc., hereunder shall be limited to restoring to good working order, provided that NDS, Inc., is not required to restore the product to good working order when such failure is due to causes beyond NDS, Inc.'s control, including but not limited to, acts of God, acts of civil or military authority, priorities, strikes, floods, epidemics, war, riots, and other causes that are beyond the manufacturers control.

These provisions are complete and exclusive statements of all terms and conditions between NDS, Inc., and the consumer. These provisions may not be varied, supplemented, qualified or interpreted by any prior course of dealings, written or oral or by trade usage. No NDS, Inc. agent, officer or employee has authority to make any representation, promise or warranty concerning these provisions.

FOR TECHNICAL INFORMATION, CONTACT: Technical Services, (888) 825-4716, TechService@ndspro.com

Visit **ndspro.com** for more information.



Our products are engineered and produced for performance, durability, ease of installation and the efficient use of resources.

California Prop 65 Warning

To meet the requirements of California Proposition 65, it is our responsibility to inform you of the following:

Warning Some products sold contain chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, please go to www.P65Warnings.ca.gov

ndspro.com

NDS Customer Service 851 N. Harvard Ave., Lindsay, CA 93247 Phone: 800.726.1994 · 559.562.9888 Press 2 for Customer Service or 3 for Technical Support Fax: 800.726.1998 · 559.562.4488

Se Habla Español

Download our Mobile App - Search for NDS Drainage







NORMA GROUP

Visit ndspro.com for:





Tools/ Calculators





Case



